

# WALL LIGHT

LX-WL-5A-2-3W



<b>IP</b> 65	<b>IK</b> 10	<b>DC24V</b> <b>AC120-240V</b>	<b>TRIAC</b>	<b>PMW</b>		
-----------------	-----------------	-----------------------------------	--------------	------------	--	--

	<b>OSRAM</b>	<b>CE</b>	<b>RoHS</b>	<b>50000h</b>
--	--------------	-----------	-------------	---------------

## Wall Light

<b>FRONT COVER</b>	12# Die-casting aluminum KAP7037 powder coated t=60-80µm. Adhesion of ISO CLASS 1 / ASTM class 4B
<b>HOUSING</b>	12# Die-casting RAL9005 powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
<b>LIGHT WINDOW</b>	UVstop & Fireproof PC
<b>CABLE CABLE</b>	IP67 PG-9 PA66
<b>GASKET</b>	Molding shaped silicone seal
<b>LED DRIVER</b>	Constant Voltage Input, Constant Current Output
<b>OPERATING TEMPERATURE</b>	-20°C-40°C
<b>POWER CABLE</b>	H05RN-F 2×1.0mm² L=0.5m (low voltage) H05RN-F 3×1.0mm² L=0.5m (high voltage)
<b>LED</b>	SMD3030 type LED
<b>DIMMABLE SURRPORT</b>	Triac•PWM•1-10V•Dali (Please refer to p.333 to see more option and specification)



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	IP Rating	Dimensions
LX-WL-5A-2-3W	1×3W	DC24V AC120-240V	1pc	88-96lm	2000K/3000K /6000K	IP65	L78×H157×W68mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**

Secondary




Sanded Black  
**RAL 9005**




Silver Grey  
**KAP 9022**

## Diagram of instruction

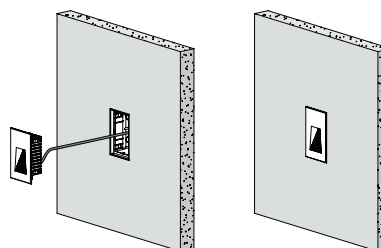

## Dimensions

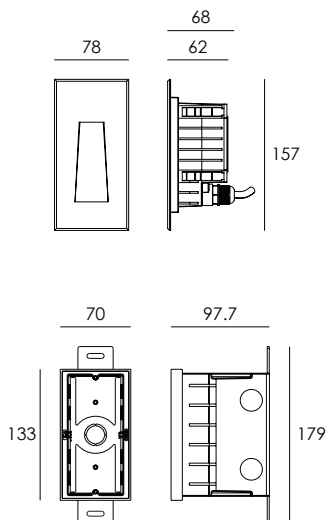

## Features



• Front cover without screws



• Use the high-strength clips for installation and fixation.  
(please refer remark ① & ②)