


# WALL LIGHT



LX-WL-7CN0634-4W

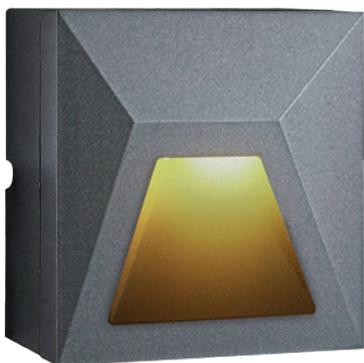

## Wall Light

HOUSING	12# Die-casting aluminum T=20-25µm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
FRONT COVER	12# Die-casting aluminum
LIGHT WINDOW	Glass=2mm UVstop & Fireproof PC=3mm
MOUNTING SLEEVE	ADC12# 151#
LIGHT SOURCE	OSRAM
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	H05RN-F 3X1.0mm² L=0.3m (high voltage)
DIMMABLE SUPPORT	Triac PWM 1-10V Dali



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	IP Rating	Dimensions
LX-WL-7CN0634-4W	6×0.6W	DC24V AC240V	6pcs	130lm	2000K/3000K /6000K	IP65	L120×H120×W66.5mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**

Secondary



Sanded Black  
**RAL 9005**



Silver Grey  
**KAP 9022**

## Dimensions

