

# WALL LIGHT



## LX-WL-B7D-VWM

IP 66	IK 04/05	DC24V AC120-240V	TRIAC	PMW	1-10V	WALL
----------	-------------	---------------------	-------	-----	-------	------

2 YEAR WARRANTY	NICHIA	CE	RoHS	50000h
-----------------------	--------	----	------	--------

### Wall Light

HOUSING MATERIAL 12# Die-casting dark grey powder coated aluminum  
t=60-80µm. Adhesion of ISO CLASS 1 / ASTM class 4B

LIGHT WINDOWS Tempered Glass . T=3mm

CABLE GLAND IP68 PG-9 PA66

GASKET Tooling shaped seal

OPERATING TEMPERATURE -20°C-40°C

LED DRIVER Constant Voltage Input, Constant Current Output

POWER CABLE H05RN-F 2×1.0mm<sup>2</sup> L=0.3m (low voltage)  
H05RN-F 3×1.0mm<sup>2</sup> L=0.3m (high voltage)



## References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-WL-B7D-VWM	1*8W	600-792lm	DC24V AC120-240V	3000K/6000K	IK04	IP66	6°/15°/24°/33°/ 45°/60°	(H74.5*L73mm)* (L150*H153.5mm)
	4*4W	1227lm			IK05		9°/15°/20°/30°/ 45°/60°	(H99.5*L102mm)* (L170*H192mm)

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Dark Grey  
**KAP 7037**

Secondary




Sanded Black  
**RAL 9005**



Silver Grey  
**KAP 9022**

## Accessories (Optional)

### TREE POLE STRAP



• More information please refer to p.94

### SPIKE TEXTURE AND ASSEMBLED EXPLANATION



- This product shares 3 series spike accessories.
- More information please refer to

## Overview




## Features



• Orientable

## Dimensions

LX-WL-B7D-VWM-8W

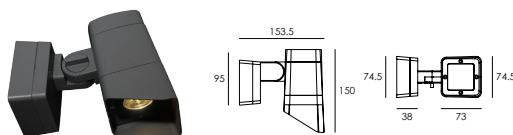

LX-WL-B7D-VWM-16W

