



WALL LIGHT

LX-WL-B7T

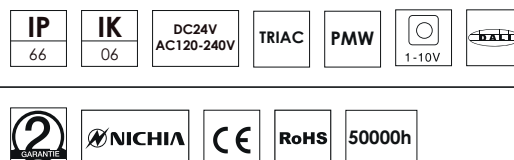

Wall Light

HOUSING	12# Die-casting dark grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOWS	Tempered Glass.T=4mm
GASKET	Tooling shaped seal
LENS/REFLECTOR	Optical lens,efficiency≥85%
LED DRIVER	Constant Voltage Input,Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	H05RN-F 2×1.0mm² L=0.3m (low voltage) H05RN-F 3×1.0mm² L=0.3m (high voltage)

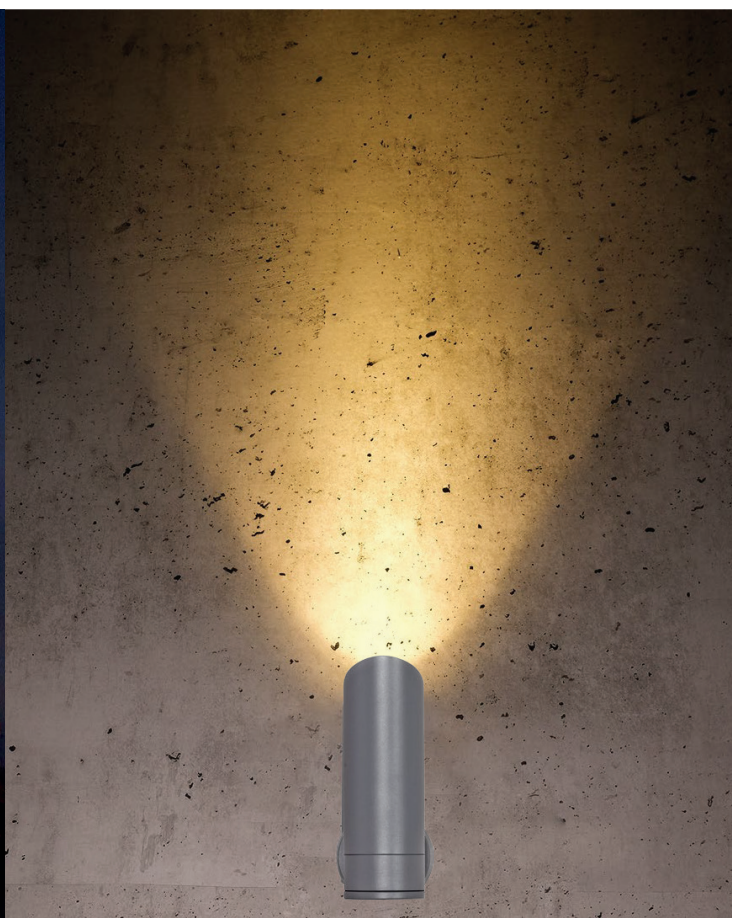

References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-WL-B7T	1*3W	274-305lm	DC24V AC120-240V	3000K/6000K	IK06	IP66	9°/15°/20°/30°/45°	Ø45*L96*H124.5mm
	1*6W	667-740lm					28°	Ø60*L120*H139mm
	1*10W	1200-1315lm					20°/36°	Ø68*L139*H148mm
	1*20W	2071-2200lm					15°/25°/38°	Ø95*L164*H196mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Brown
RAL 8019

Accessories (Optional)

TREE POLE STRAP




- LX-RD003: LX-TMS0158
LX-TNS0126
- LX-RD002: LX-TOS0128
LX-TPS0171
- More information please refer to p.94

Overview




BEVEL CUT HOOD

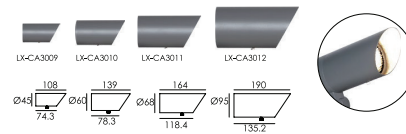


- LX-CA3009: LX-TMS0158
LX-CA3010: LX-TNS0126
LX-CA3011: LX-TOS0128
LX-CA3009: LX-TPS0171

Dimensions


LX-WL-B7T-3W



LX-WL-B7T-6W



LX-WL-B7T-10W



LX-WL-B7T-20W

