

WALL LIGHT



LX-WL-B8-EFG



Wall Light


HOUSING MATERIAL Extruded aluminum alloy #6063

PAINTING Powder coating, T=60~80µm.
Adhesion of ISO CLASS 1/astm class 4B

REDLECTOR Optical reflector, efficiency≥85%

POWER CABLE H05RN-F 2×1.0mm² L=0.3m (low voltage)
H05RN-F 3×1.0mm² L=0.3m (high voltage)

OPERATING TEMPERATURE -20°C-40°C

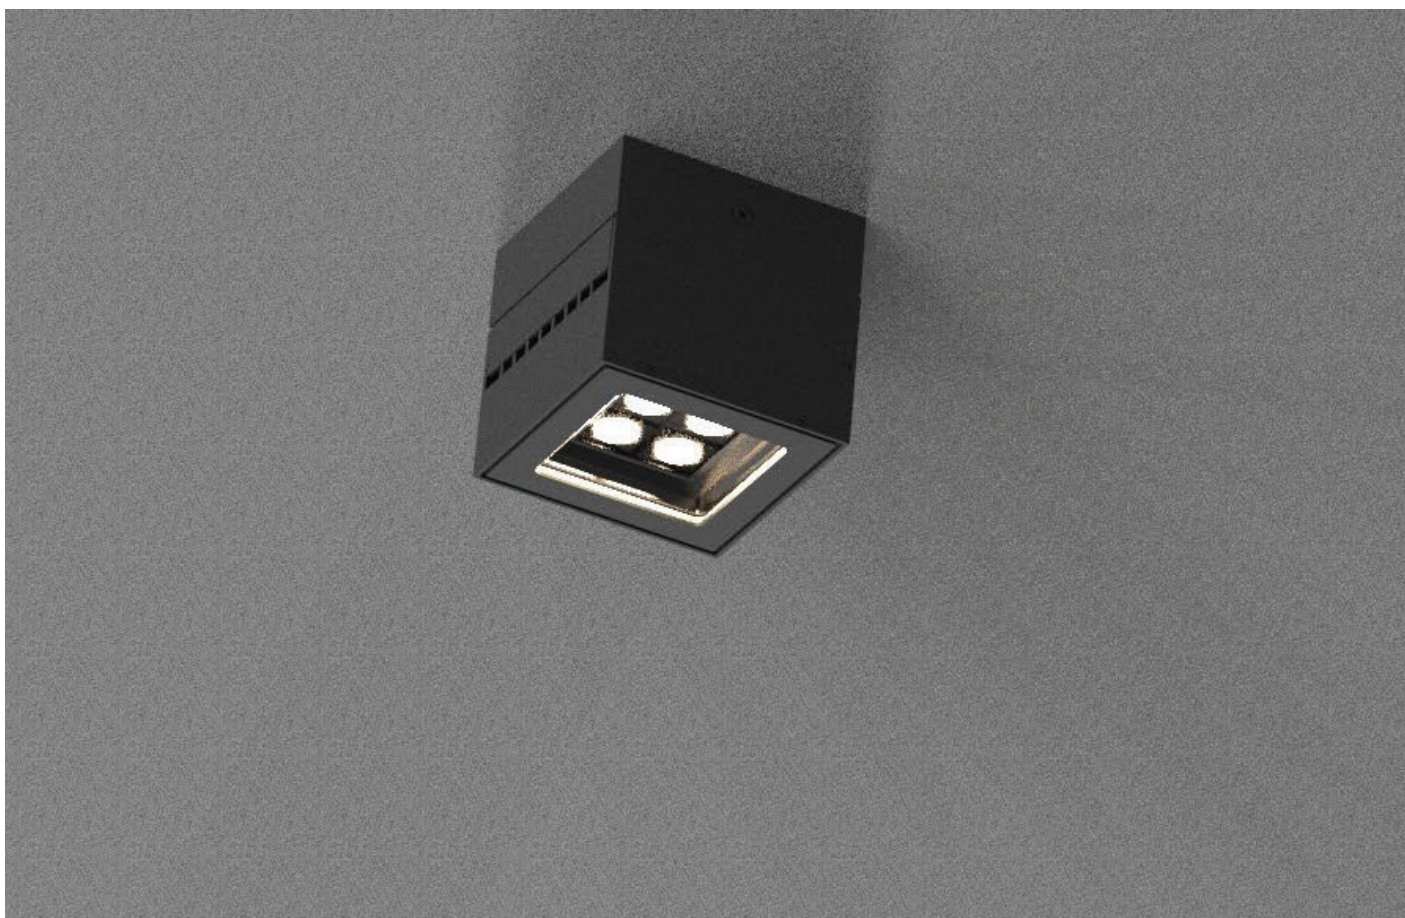

References


Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-WL-B8-EFG	4*3.5W	1206lm	DC24V AC120-240V	3000K/6000K	IK05	IP65	9°/15°/20°/30°/45° /60°	H113.5*L120mm
	9*3W	2541lm						H118.5*L160mm
	25*3W	5832lm			H149*L250mm			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


Accessories (Optional)

BEVEL CUT HOOD

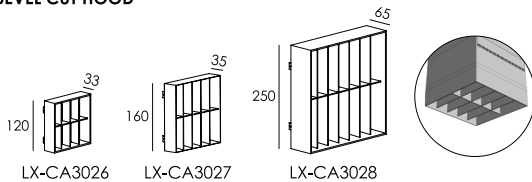


Dimensions

LX-WL-B8-EFG-15W



LX-WL-B8-EFG-27W



LX-WL-B8-EFG-75W

