

WALL LIGHT

LX-WL-D7-FEC



Wall Light

HOUSING MATERIAL T=60~80µm, adhesion of ISO CLASS 1/astm class 4B
12# Die-casting powder coated aluminum


LIGHT WINDOW Tempered Glass T=4mm

LED DRIVER Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm² L=0.3m (low voltage)
H05RN-F 3×1.0mm² L=0.3m (high voltage)

REDLECTOR Triac PWM 1-10V Dali

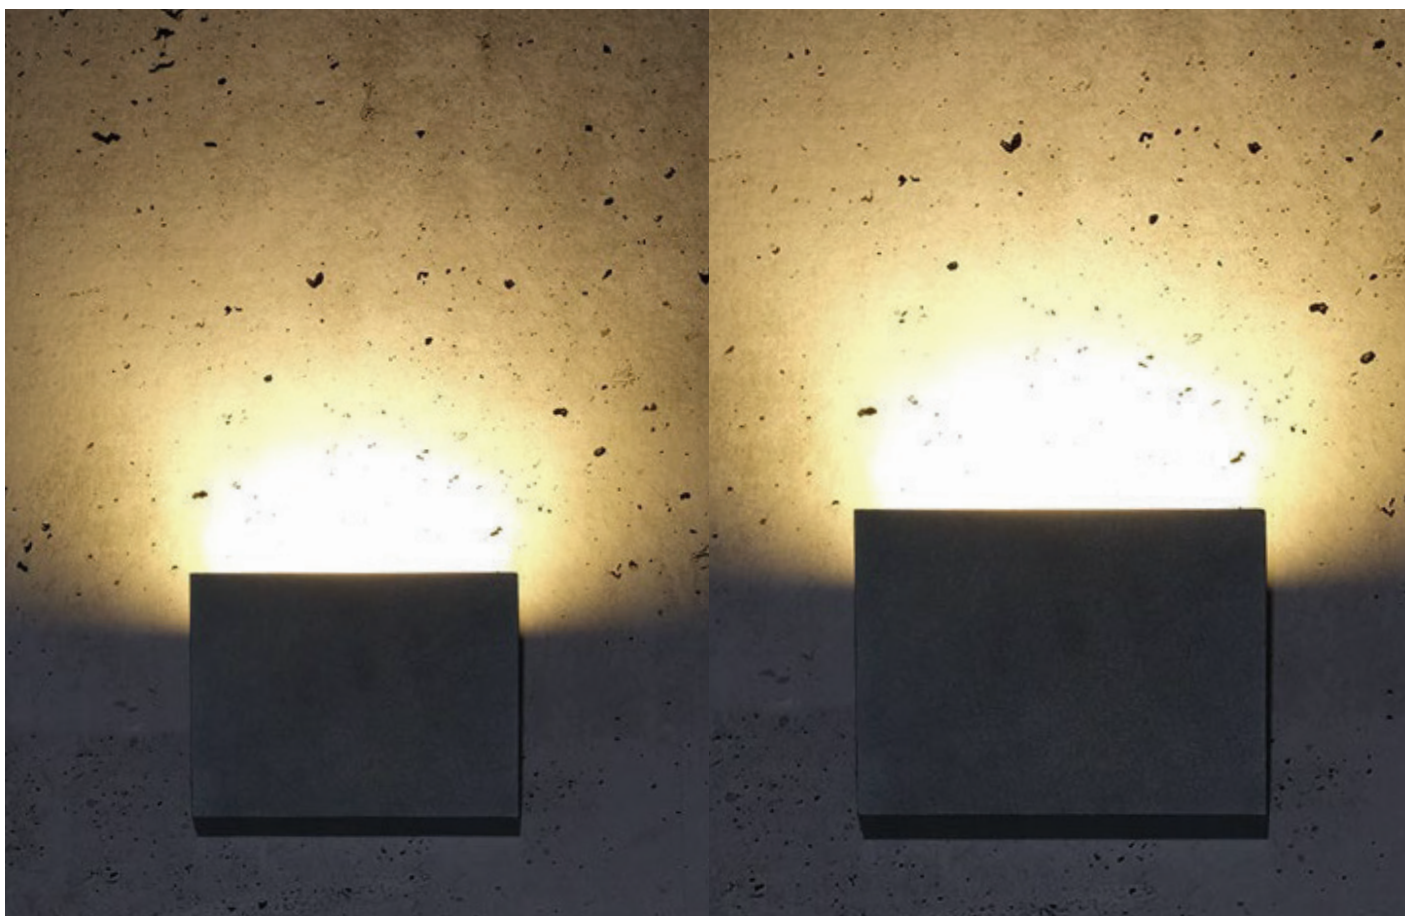

References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-WL-D7-FEC	3×2W	378-413lm	DC24V AC120-240V	3000K/6000K	IK03	IP65	75°×65°	H160*L111*W74mm
	5×3W	803-850lm			IK05			H200*L150*W92mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037

Secondary




Sanded Black
RAL 9005



Silver Grey
KAP 9022

Dimensions

LX-WL-D7-FEC-6W

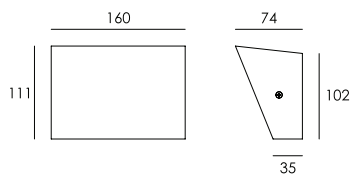

LX-WL-D7-FEC-15W

