

WALL LIGHT

LX-WL-ED7-DCB



IP 65	IK 01/03	DC24V AC120-240V	TRIAC	PMW	1-10V	OSRAM
----------	-------------	---------------------	-------	-----	-------	-------

2 YEAR WARRANTY	OSRAM	CE	RoHS	50000h
-----------------------	-------	----	------	--------

Wall Light

HOUSING MATERIAL T=60~80µm, adhesion of ISO CLASS 1/astm class 4B
12# Die-casting dark grey powder coated aluminum

LIGHT WINDOW T=3mm

LED DRIVER Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm² L=0.3m (low voltage)
H05RN-F 3×1.0mm² L=0.3m (high voltage)



References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Light direction	Dimensions
LX-WL-ED7-DCB	3×2W	369lm	DC24V AC120-240V	2000K/3000K /6000K	IK03	IP65	87°×75°	One side	H150*L150*W75mm
	6×2W	2×369lm						Two side	
	5×2W	596lm			IK01		93°×75°	One side	H200*L200*W85mm
	10×2W	2×596lm						Two side	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037

Secondary




Sanded Black
RAL 9005




Silver Grey
KAP 9022

Diagram of instruction

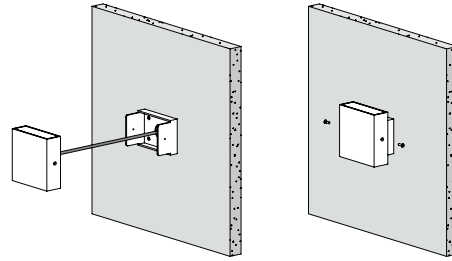

Dimensions

LX-WL-ED7-DCB-6W
LX-WL-ED7-DCB-12W

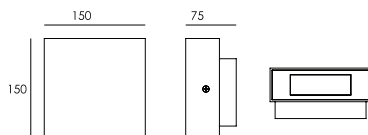

LX-WL-ED7-DCB-10W
LX-WL-ED7-DCB-20W

