

WALL LIGHT



LX-WL-ED7-EFB



Wall Light

HOUSING MATERIAL T=60~80µm, adhesion of ISO CLASS 1/astm class 4B
12# Die-casting dark grey powder coated aluminum

LIGHT WINDOW T=3mm

GASKET Tooling shaped seal

DRIVER Driver inside builded

OPERATING TEMPERATURE -20°C-40°C

POWER CABLE H05RN-F 2×1.0mm² L=0.3m (low voltage)
H05RN-F 3×1.0mm² L=0.3m (high voltage)



References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Light direction	Dimensions
LX-WL-ED7-EFB	5×1.5W	517lm	DC24V AC120-240V	2000K/3000K /6000K	IK02	IP65	97°×99°	One side	H150*L200*W120mm
	10×1.5W	2×517lm						Two side	
	8×1.5W	899lm			IK03		100°×100°	One side	H100*L300*W120mm
	16×1.5W	2×899lm						Two side	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option

Basic



Sanded Dark Grey
KAP 7037

Secondary




Sanded Black
RAL 9005




Silver Grey
KAP 9022

Diagram of instruction

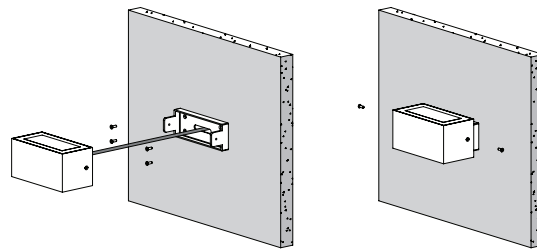

Dimensions

LX-WL-ED7-EFB-7.5W
LX-WL-ED7-EFB-15W



LX-WL-ED7-EFB-12W
LX-WL-ED7-EFB-24W

