

# WALL LIGHT



## LX-WL-ED7-GHB

<b>IP</b> 65	<b>IK</b> 03/04	<b>DC24V</b> <b>AC120-240V</b>	<b>TRIAC</b>	<b>PMW</b>	<b>1-10V</b>	<b>RA11</b>
-----------------	--------------------	-----------------------------------	--------------	------------	--------------	-------------

<b>2</b> GARANTIE	<b>OSRAM</b>	<b>CE</b>	<b>RoHS</b>	<b>50000h</b>
----------------------	--------------	-----------	-------------	---------------

### Wall Light

**HOUSING** 12# Die-casting dark grey powder coated aluminum  
T=60-80µm.Adhesion of ISO class 1/ASTM class 4B

**Glass** T=3mm

**GASKET** Tooling shaped seal

**LED** OSRAM

**DRIVER** Driver inside builded

**OPERATING TEMPERATURE** -20°C-40°C

**POWER CABLE** H05RN-F 2×1.0mm<sup>2</sup> L=0.3m(low voltage)  
H05RN-F 3×1.0mm<sup>2</sup> L=0.3m(high voltage)



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Input Voltage	Led Quantity	Luminous flux	CCT/K	Optics	IP Rating	Dimensions
LX-WL-ED7-GHB-5W (ONE SIDE)	5x1W	DC24V AC120-240V	5pcs	368lm	2000K/3000K /6000K	92°x75°	IP65	L200*H57*W110mm
LX-WL-ED7-GHB-10W (TWO SIDE)	10x1W		10pcs	2x368lm				
LX-WL-ED7-GHB-9W (ONE SIDE)	9x1W		9pcs	629lm				L300*H57*W112mm
LX-WL-ED7-GHB-18W (TWO SIDE)	18x1W		18pcs	2x629lm				

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Dark Grey  
**KAP 7037**

Secondary




Silver Grey  
**KAP 9022**





Sanded Black  
**RAL 9005**

## Diagram of instruction


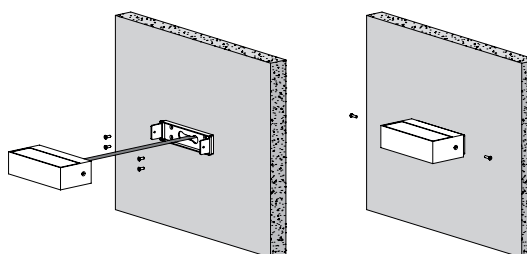


## Dimensions

LX-WL-ED7-GHB-5W (ONE SIDE)  
LX-WL-ED7-GHB-10W (TWO SIDE)



LX-WL-ED7-GHB-9W (ONE SIDE)  
LX-WL-ED7-GHB-18W (TWO SIDE)



## Beam demo

