FLOOD LIGHT





FLOOD LIGHT LX-FL-06-G5

Tunnel light, Sports field, Parking lot, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.

Significant energy saving : 130Lm/W system efficiency

Nicely die-casting ADC12 aluminum alloy housing

4mm tempered glass cover, strong protection and good optical function.

Operating Temperature : -20°C to +50°C

Small size, light weight, cheaper shipping cost.

Easy to install





www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Weight	Weight
LX-FL-06-G5	20W	2600lm	- 3000K/4000K/5000K - /5700K	30°/60°/90°/150° /60°*20°/156°*71°	IP65	0.6kg(1.3lbs)	164.60*153.60*37.80mm
	30W	3900lm				1.3kg(2.9lbs)	226*267.60*44.08mm
	50W	6500lm				1.3kg(2.9lbs)	
	100W	13 000lm				3.1kg(6.8lbs)	299*362.10*54.08mm
	150W	19 500lm				4.8kg(10.6lbs)	- 349*420.10*62.58mm
	200W	26 000lm				4.8kg(10.6lbs)	
	300W	39 000lm				7.3kg(16.1lbs)	402*516.80*63.80mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Feature



Dimensions(mm)







20W

30W/50W

















www.luxio-lighting.com

Mounting





Installation and use

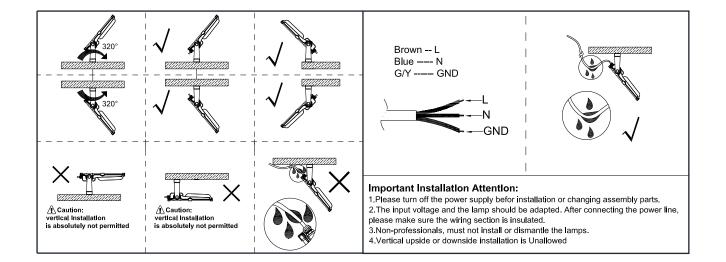



www.luxio-lighting.com