

FLOOD LIGHT

LX-FL-07-G11



| | | |
|----------|------------|------------|
| IP 66 | AC100-277V | CRI >80 |
|----------|------------|------------|



| | | | |
|----|----|------|----------|
| CE | CB | RoHS | 50000hrs |
|----|----|------|----------|


Better solutions for Led Flood Light

Sports lighting, Stadium lighting, Sports fields, Car parkes, High mast installations Dock, railway and container yards, Ports and other large scale outdoor applications, Architectural lighting, Landscape lighting, Industrial and commercial exterior lighting Decorative lighting for holidays, tradeshow, exhibitions.

Operating Temperature : -40°C ~ +50°C

Storage Temperature : -40°C ~ +80°C

Leds : SAMSUNG 3535 SMD5050

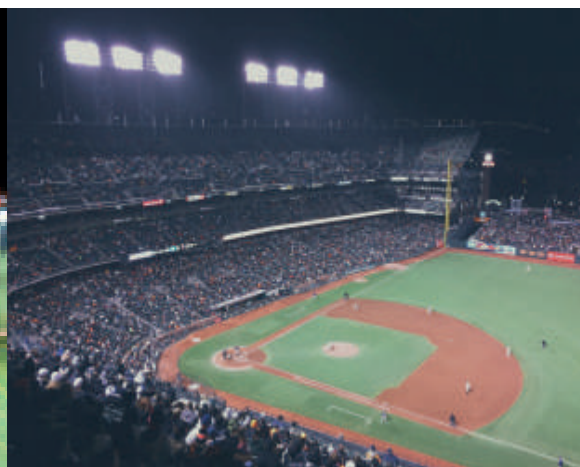

luxio
L I G H T I N G

www.luxio-lighting.com



References

| Reference | Led Power | Luminous flux | CCT/K | OPTICS | IP Rating | Weight | Weight |
|--------------|-----------|-------------------------------|-----------------------------|------------------------------------|-----------|-----------------|---------------------------|
| LX-FL-07-G11 | 200W | 110Lm/w 120Lm/w 140Lm/w | 3000K/4000K/5000K /5700K | 10°/15°/30°/60°/ 90°/(117°*34°) | IP66 | 8.5kg(18.7lbs) | L460.45*W182.67*H189.53mm |
| | 240W | | | | | 8.5kg(18.7lbs) | |
| | 300W | | | | | 8.8kg(19.4lbs) | |
| | 400W | | | | | 19kg(41.8lbs) | L486.40*W361*H393.03mm |
| | 500W | | | | | 19kg(41.8lbs) | |
| | 600W | | | | | 19.7kg(43.4lbs) | |
| | 700W | | | | | 25kg(55.1lbs) | L486.40*W371*H502.05mm |
| | 900W | | | | | 26kg(57.3lbs) | |
| | 1000W | | | | | 31.0kg(68.3lbs) | L485.63*W371*H721.03mm |
| | 1200W | | | | | 32.5kg(71.7lbs) | |



Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .



Dimensions(mm)





200W/240W/300W



700W/900W



400W/500W/600W




1000W/1200W



www.luxio-lighting.com


Installation and use

01




M10x45mm

02




| Power | D1 | D2 | L1 | L2 | L3 |
|-------|--------|--------|------|-------|-------|
| 300W | 12.0mm | 12.0mm | 30mm | 220mm | |
| 600W | 17mm | 17mm | 60mm | 200mm | 120mm |
| 800W | 17mm | 17mm | 60mm | 200mm | 120mm |
| 1200W | 17mm | 17mm | 60mm | 200mm | 120mm |


03




04




05




Brown(Black) — L
Blue(White) — N
Green/Yellow — GND



Rotatable $\pm 30^\circ$



⚠ Caution:
Vertical installation
is absolutely not permitted



⚠ Caution: When the angle of the luminous surface exceeds 90° , the lamp power is reduced by 20%.

