


INGROUND

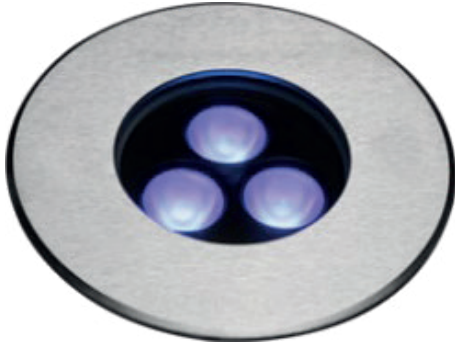

LX-IG-R69-6W

IP 67	IK 08	AC100-240V DC24V	TRIAC	PMW	1-10V	RoHS
----------	----------	---------------------	-------	-----	-------	------

2 YEAR WARRANTY	OSRAM	CE	RoHS	50000h
-----------------------	-------	----	------	--------

Inground

FRONT COVER Hard chromeplated stainless steel SUS 316#

HOUSING 12# Die-casting dark grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

LIGHT WINDOW Tempered frosted step glass, T=8mm

POWER CABLE H05RN-F 2X1.0mm² L=0.5m (low voltage)
H05RN-F 3X1.0mm² L=0.5m (high voltage)

LED TYPE OSRAM

GLASS PRESSURE Full area=3,370kgs
CAPACITY

OPERATING TEMPERATURE -20°C~40°C



luxio
L I G H T I N G

www.luxio-lighting.com

References


Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Optics	Dimensions
LX-IG-R69	3*2W	388-452lm	AC100-240V DC24V	2000K/3000K/6000K	IK08	IP67	9°/15°/20°/30° /45°	Ø116*H44mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Water Proof Solution

- A** Water stopper(Included)
- B** Water proof connector IP67(Option)

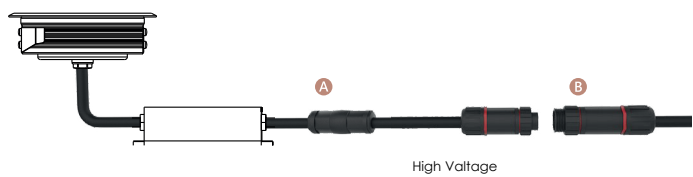

Installation Diagram

Low Voltage



A: Minimum space for external driver is 20mm.

High Voltage



A: Minimum space for external driver is 48mm.
B: External driver of high voltage.

Dimensions

