


# INGROUND

## LX-IG-ZD

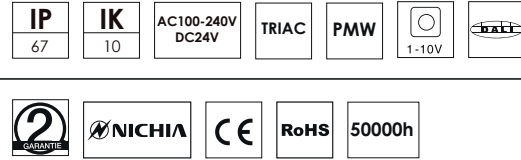

### Inground

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	Hard chromeplated stainless steel SUS 316#
LIGHT WINDOW	UVstop & Fireproof PC
GASKET	Silicon rubber molding shaped seal
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm2 L=0.5m(low voltage) H05RN-F 3X1.0mm2 L=0.5m(high voltage)
LED TYPE	OSRAM SMD3030
RECESSED SLEEVE MATERIAL	PC/ABS ALLOYS
GLASS PRESSURE CAPACITY	>2,000kgs
OPERATING TEMPERATURE	-20°C~40°C




## References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	IK Rating	IP Rating	Dimensions
LX-IG-ZD1	1*2W	13-15lm	AC100-240V DC24V	2000K/3000K/6000K	IK10	IP67	Ø55*W86.5mm
LX-IG-ZD2		10-14lm					

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Sleeve / Water proof solution

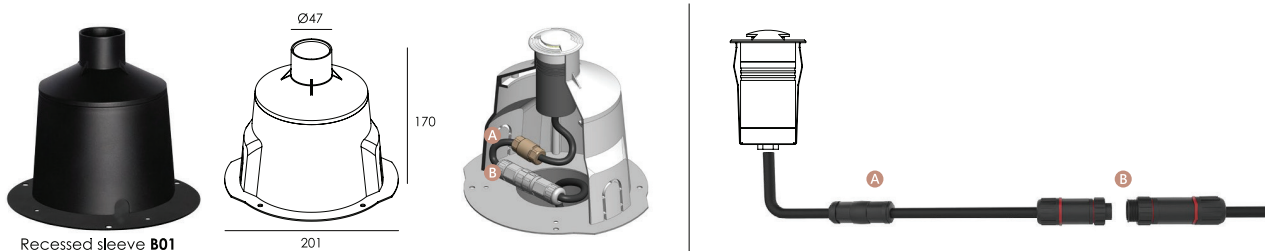

### A Water-Stopper(Included)

The luminaire will generate high temperature when used, which will generate negative pressure when the power is turned off also brings water vapor into the luminaire. That's why the device is required to block the entry of water vapor.

### B IP67 Jiffy quick plug/socket connector(Optional)

To prevent water vapor into luminaire via wire which had been cut, the air contains lots of steams when raining, spray or in humid environment, the luminaire will generate high temperature when used, which will generate negative pressure when the power is turned off also brings water vapor into the luminaire.

## Dimensions

