

# DOWNLIGHT



## ATHENA R

IP 65	CRI RA>90	AC220-240V	TRIC	DALI	0/1-10V	Anti-Glare
----------	--------------	------------	------	------	---------	------------



### ATHENA R DOWNLIGHT

Precise light distribution in three types: general lighting, ambient lighting and wall washing. Varied colors for secondary reflector with rim&rimless trim version allow more flexible combination. Anti glare accessories for excellent visual comfort.

#### 1.Heat Dispersion System

Straight heat sink design achieves high.

Performance of heat dispersion and keeps LED.

Chip working in high luminous efficiency and in a long lifetime.

#### 2.Multiple Optic

Four kinds of beam: 15° /24° /36° / 50° in precise speckle

#### 3.Anti-glare Design

Led chip is fixed deep inside to create a perfect cutoff angle in 40° .

Dark light effect achieves UGR<19, reduces discomfort glare and provides better visual effect.

The consideration of IP65 Construction makes Miracle to be widely used in various kinds of application.



## References


Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-01075F	9W	630lm	2700K/3000K/3500K/4000K /5700K	15°/24°/36°/50°	IP65	Ø85*91mm
	12W	840lm				
LX-DL-01075A	9W	630lm				
	12W	840lm				Ø85*99mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic


Important : All the specification can be customized as per the project request .

## Dimensions

LX-DL-01075F

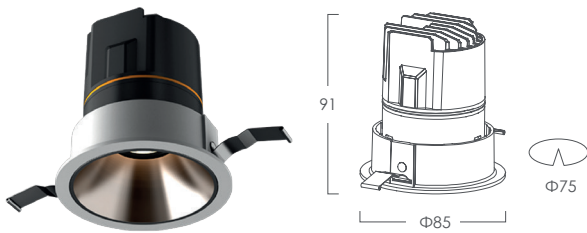

LX-DL-01075A

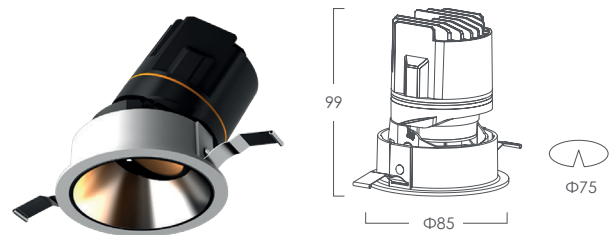



Fixed module



Adjustable module



Wall Washer Module

---

**Round set**



Round Trim



Secondary Reflector  
(Fixed)



Secondary Reflector  
(Adjustable)



Wall Washing

---

**Optical Films**



Honey comb



Clear Glass



Striped Glass



Frosted Softness



Sleeve

---

**Secondary Reflector**



Chrome



White



Black



Silver