


DOWNLIGHT

ATHENA SW



IP 65	CRI RA>90	AC220-240V	TRIC	DALI	0/1-10V	Anti-Glare
----------	--------------	------------	------	------	---------	------------

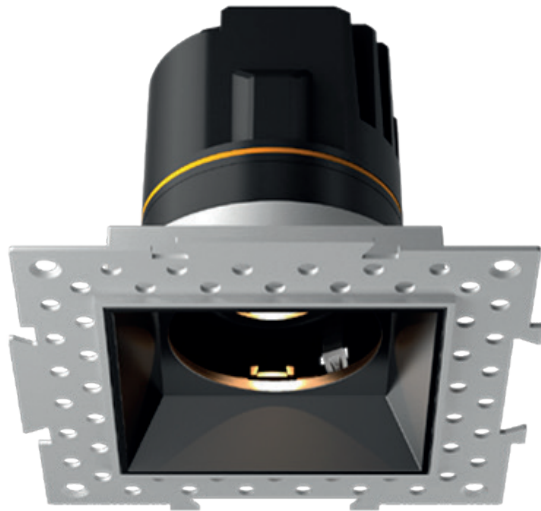

ATHENA S DOWNLIGHT

Precise light distribution in three types: general lighting, ambient lighting and wall washing. Varied colors for secondary reflector with rim&rimless trim version allow more flexible combination. Anti glare accessories for excellent visual comfort.

1.Heat Dispersion System

Straight heat sink design achieves high.

Performance of heat dispersion and keeps LED.

Chip working in high luminous efficiency and in a long lifetime.

2.Multiple Optic

Four kinds of beam: 15° /24° /36/° 50° in precise speckle

3.Anti-glare Design

Led chip is fixed deep inside to create a perfect cutoff angle in 40° .

Dark light effect achieves UGR<19, reduces discomfort glare and provides better visual effect.

The consideration of IP65 Construction makes Miracle to be widely used in various kinds of application.



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-W01075FST	9W	630lm	2700K/3000K/3500K/4000K /5700K	15°/24°/36°/50°	IP65	114*114*91mm
	12W	840lm				
LX-DL-W01075AST	9W	630lm				
	12W	840lm				

Order code : Reference - Power - Luminous flux - CCT/K - Optic


Important : All the specification can be customized as per the project request .

REFLECTORS IN DIFFERENT COLOR




Chrome Silver White Black

Trimless Installation

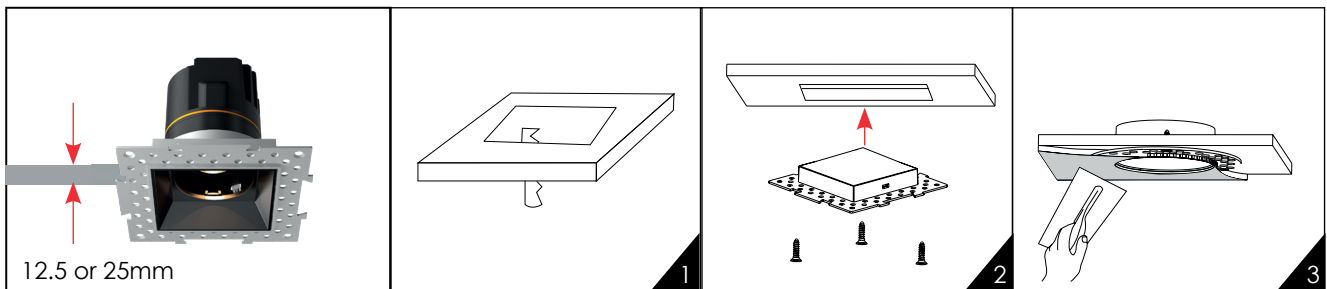


Dimensions

LX-DL-W01075FST

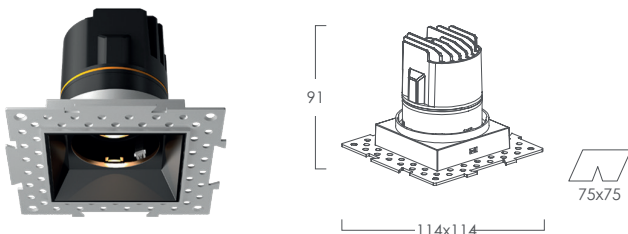

LX-DL-W01075AST

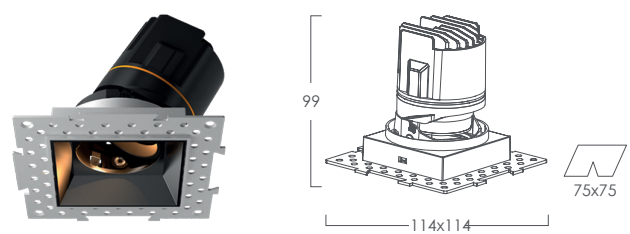



Fixed module



Adjustable module



Wall Washer Module

Square set



Square Trimless



Secondary Reflector
(Fixed)



Secondary Reflector
(Adjustable)



Wall Washing

Optical Films



Honey comb



Clear Glass



Striped Glass



Frosted Softness



Sleeve

Secondary Reflector



Chrome



White



Black



Silver