

DOWNLIGHT



DEEP R

IP 20/54	CRI >90	AC220V/36V	Anti-Glare	No Flicker
--------------------	-------------------	-------------------	-------------------	-------------------

Optional

PHASE	1-10V	DMT	Bluetooth
--------------	--------------	------------	------------------


3 YEAR WARRANTY	CITILED. The Light Engine	CE	RoHS	50,000 HOURS
---------------------------	-------------------------------------	-----------	-------------	------------------------

DEEP R

Excellent waterproof function, it can play a better effect in wet space.

Applications : Star-rated Hotels, Villas, Residential buildings, etc.

PHYSICAL : Aluminum

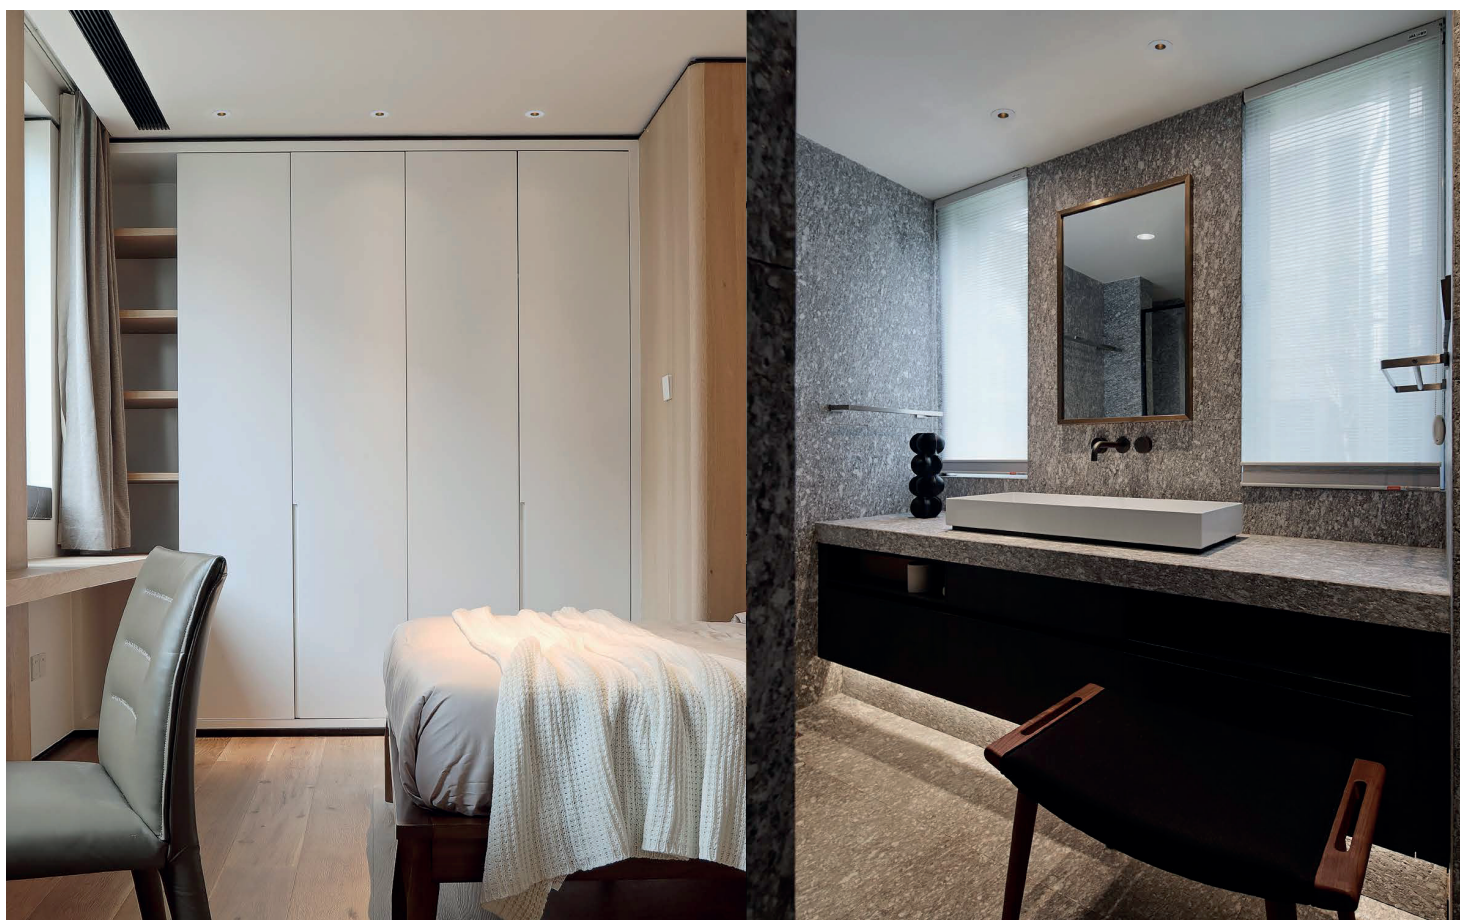

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-1603	5W	204-294lm	2700K	15°/20°/25°/30°/15°x40°	IP20/IP54	Ø60*62mm
		209-308lm	3000K			
	7W	250-348lm	2700K			
		254-369lm	3000K			
LX-DL-1604	5W	204-287lm	2700K			Ø60*66mm
		209-309lm	3000K			
	7W	242-343lm	2700K			
		254-366lm	3000K			
LX-DL-1863	8W	492-612lm	2700K	15°/24°/38°/15°x40°	IP20/IP54	Ø86*100mm
		502-630lm	3000K			
	10W	539-693lm	2700K			
		551-735lm	3000K			
	12W	646-802lm	2700K			
		660-813lm	3000K			
	15W	708-868lm	2700K			
		715-908lm	3000K			
LX-DL-1864	8W	492-879lm	2700K			Ø86*105mm
		502-626lm	3000K			
	10W	539-693lm	2700K			
		551-734lm	3000K			
	12W	646-802lm	2700K			
		660-841lm	3000K			
	15W	708-868lm	2700K			
		715-909lm	3000K			
LX-DL-11163	20W	905-1358lm	2700K			Ø116*125mm
		911-1402lm	3000K			
	25W	1119-1593lm	2700K			
		1132-1602lm	3000K			
	30W	1257-1754lm	2700K			
		1260-1772lm	3000K			
LX-DL-11164	20W	905~1358lm	2700K			Ø116*133mm
		911~1421lm	3000K			
	25W	1119-1593lm	2700K			
		1132-1607lm	3000K			
	30W	1257-1759lm	2700K			
		1260-1772lm	3000K			







Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features



Dimensions

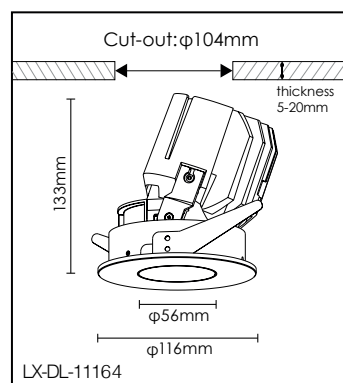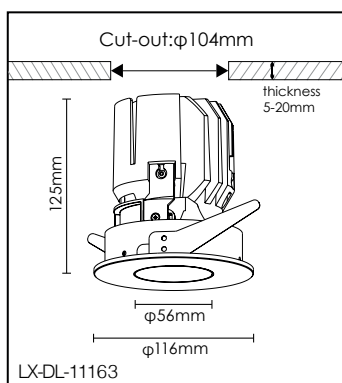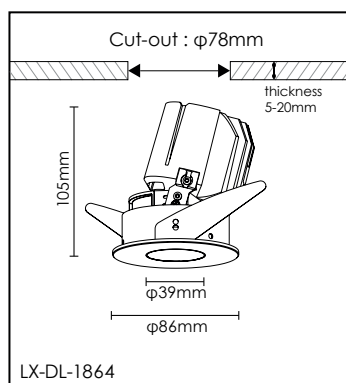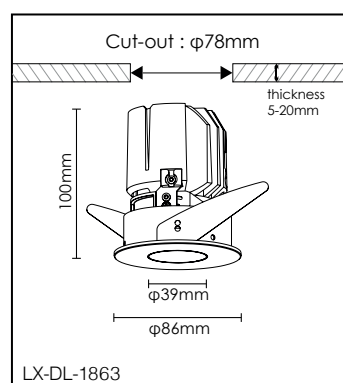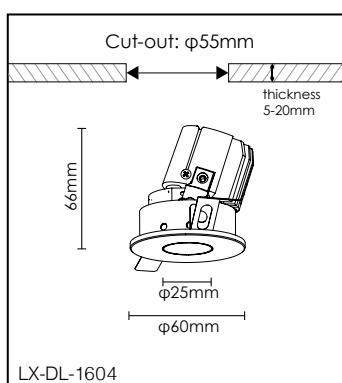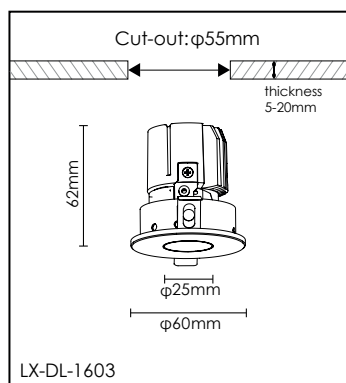

To install the trimmed version

