

DOWNLIGHT

GLOBE



IP 20/54	CRI >90	AC220V/36V	Anti-Glare	No Flicker
--------------------	-------------------	-------------------	-------------------	-------------------

Optional

PHASE	1-10V	0-10V	Bluetooth
--------------	--------------	--------------	------------------

3 YEAR WARRANTY	CITILED. The Light Engine	CE	RoHS	50000 HOURS
------------------------------	-------------------------------------	-----------	-------------	-----------------------

GLOBE

Exquisite physique design makes it suitable for all kinds of low ceiling and narrow space.

Applications : Star-rated Hotels, Villas, Residential buildings, etc.

PHYSICAL : Aluminum



luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-1601	5W	282-360lm	2700K	15°/20°/25°/30°/15°x40°	IP20/IP54	Ø60*60mm
		321-390lm	3000K			
	7W	338-432lm	2700K			
		383-468lm	3000K			
LX-DL-1602	5W	282-374lm	2700K			Ø60*65mm
		326-391lm	3000K			
	7W	338-430lm	2700K			
		389-470lm	3000K			
LX-DL-1861	8W	621-671lm	2700K	15°/24°/38°/15°x40°	IP20/IP54	Ø86*95mm
		642-693lm	3000K			
	10W	696-789lm	2700K			
		753-799lm	3000K			
	12W	821-932lm	2700K			
		837-888lm	3000K			
	15W	889-1020lm	2700K			
		939-1033lm	3000K			
LX-DL-1862	8W	621-671lm	2700K			Ø86*106mm
		655-721lm	3000K			
	10W	696-789lm	2700K			
		747-799lm	3000K			
	12W	819-932lm	2700K			
		844-912lm	3000K			
	15W	889-1020lm	2700K			
		928-1033lm	3000K			
LX-DL-11161-S	20W	1253-1446lm	2700K			Ø116*140mm
		1278-1615lm	3000K			
	25W	1495-1707lm	2700K			
		1505-1833lm	3000K			
	30W	1678-1918lm	2700K			
		1701-2072lm	3000K			
LX-DL-11162-S	20W	1253-1446lm	2700K			Ø116*147mm
		1278-1580lm	3000K			
	25W	1495-1707lm	2700K			
		1505-1824lm	3000K			
	30W	1678-1918lm	2700K			
		1701-2018lm	3000K			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features

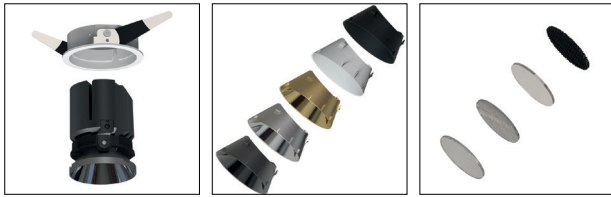

Dimensions

