



DOWNLIGHT

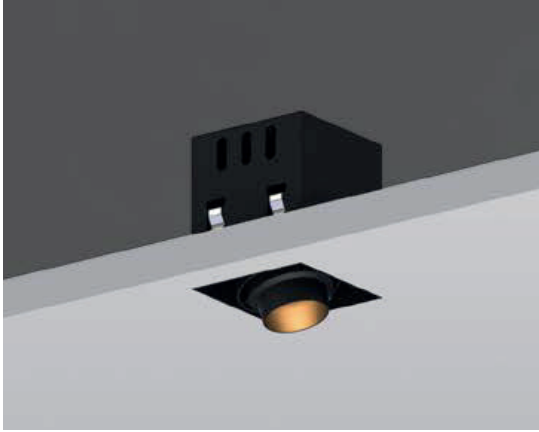

GRIDIX AW



GRIDIX AW

The single / double / triple heads anti-glare tube design can reduce glare and enhance comfort to a greater extent; And the universal adjustable design can help you to project light onto object more accurately, highlighting a single area or object.

Applications : Hotels, Bars, Restaurants, Shopping centers, Retail stores, Showrooms, Galleries, Large architectural structures, etc.

Physical : Aluminum

Colour(housing) : Black + White

Colour(reflector) : Black

Colour temperature : 2700K, 3000K, 4000K, 5000K



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-W2661	8W	543-638lm	2700K	15°/24°/40°	IP20	L94*H94*W117mm
		636-671lm	3000K			
	12W	756-813lm	2700K			L94*H94*W134mm
		825-878lm	3000K			
LX-DL-W2662	2*8W	1086-1276lm	2700K			L190*H94*W117mm
		1272-1342lm	3000K			
	2*12W	1512-1626lm	2700K			L190*H94*W134mm
		1650-1756lm	3000K			
LX-DL-W2663	3*8W	1629-1914lm	2700K			L275*H94*W117mm
		1908-2013lm	3000K			
	3*12W	2268-2439lm	2700K			L275*H94*W134mm
		2475-2634lm	3000K			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions

