


DOWNLIGHT

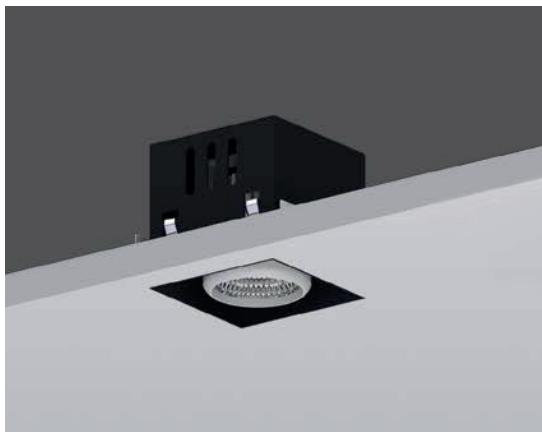

GRIDIX BW

IP 20	CRI >90	AC220-240V	Anti-Glare	No Flicker
-----------------	-------------------	-------------------	-------------------	-------------------

PHASE	1-10V	Bluetooth	Bluetooth
--------------	--------------	------------------	------------------

3 YEAR WARRANTY	CITIZEN Micro Computer Tech.	CE	RoHS	50000h@L80
---------------------------	--	-----------	-------------	-------------------

GRIDIX BW

The single / double / triple heads reflector design provides higher luminous efficiency. And the universal adjustable design can help you to project light on multiple objects more accurately, highlighting multiple areas or objects.

Applications : Hotels, Shopping centers, Restaurants, Galleries, Large architectural structures, Retail stores, Showrooms, Bars, etc.

Physical : Aluminum

Colour(housing) : Black + White

Colour(reflector) : White

Colour temperature : 2700K, 3000K, 4000K, 5000K



luxio
LIGHTING

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-W2811	15W	1183-1211lm	2700K	12°/24°/48°/62°	IP20	L133*H133*W128mm
		1220-1229lm	3000K			
	20W	1623-1657lm	2700K			
		1639-1679lm	3000K			
	25W	1925-1938lm	2700K			
		1928-1972lm	3000K			
LX-DL-W2812	2*15W	2366-2422lm	2700K			L227*H123*W128mm
		2440-2458lm	3000K			
	2*20W	3246-3314lm	2700K			
		3278-3358lm	3000K			
	2*25W	3850-3876lm	2700K			
		3856-3944lm	3000K			
LX-DL-W2813	3*15W	3549-3633lm	2700K			L332*H123*W128mm
		3660-3687lm	3000K			
	3*20W	4869-4971lm	2700K			
		4917-5037lm	3000K			
	3*25W	5775-5814lm	2700K			
		5784-5916lm	3000K			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions

