

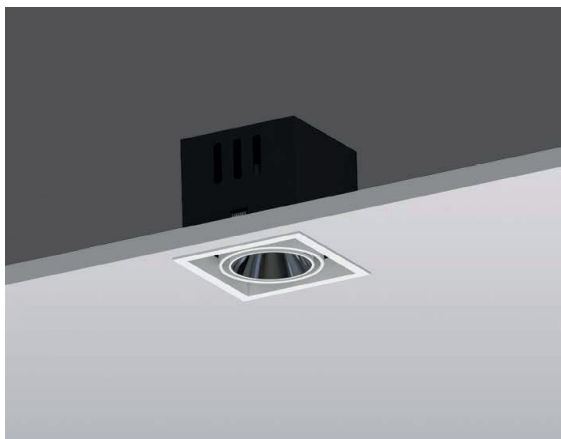


DOWNLIGHT



GRIDIX C



GRIDIX C

The single / double / triple Single head adjustable angle design can help more accurately project light onto the object, highlighting a single area or object.


Applications : Star-rated Hotels, Villas, Residential buildings, etc.

Physical : Aluminum

Colour(housing) : Black + White

Colour(reflector) : Dark chrome, Specular, Gold, White, Black

Colour temperature : 2700K, 3000K, 4000K, 5000K

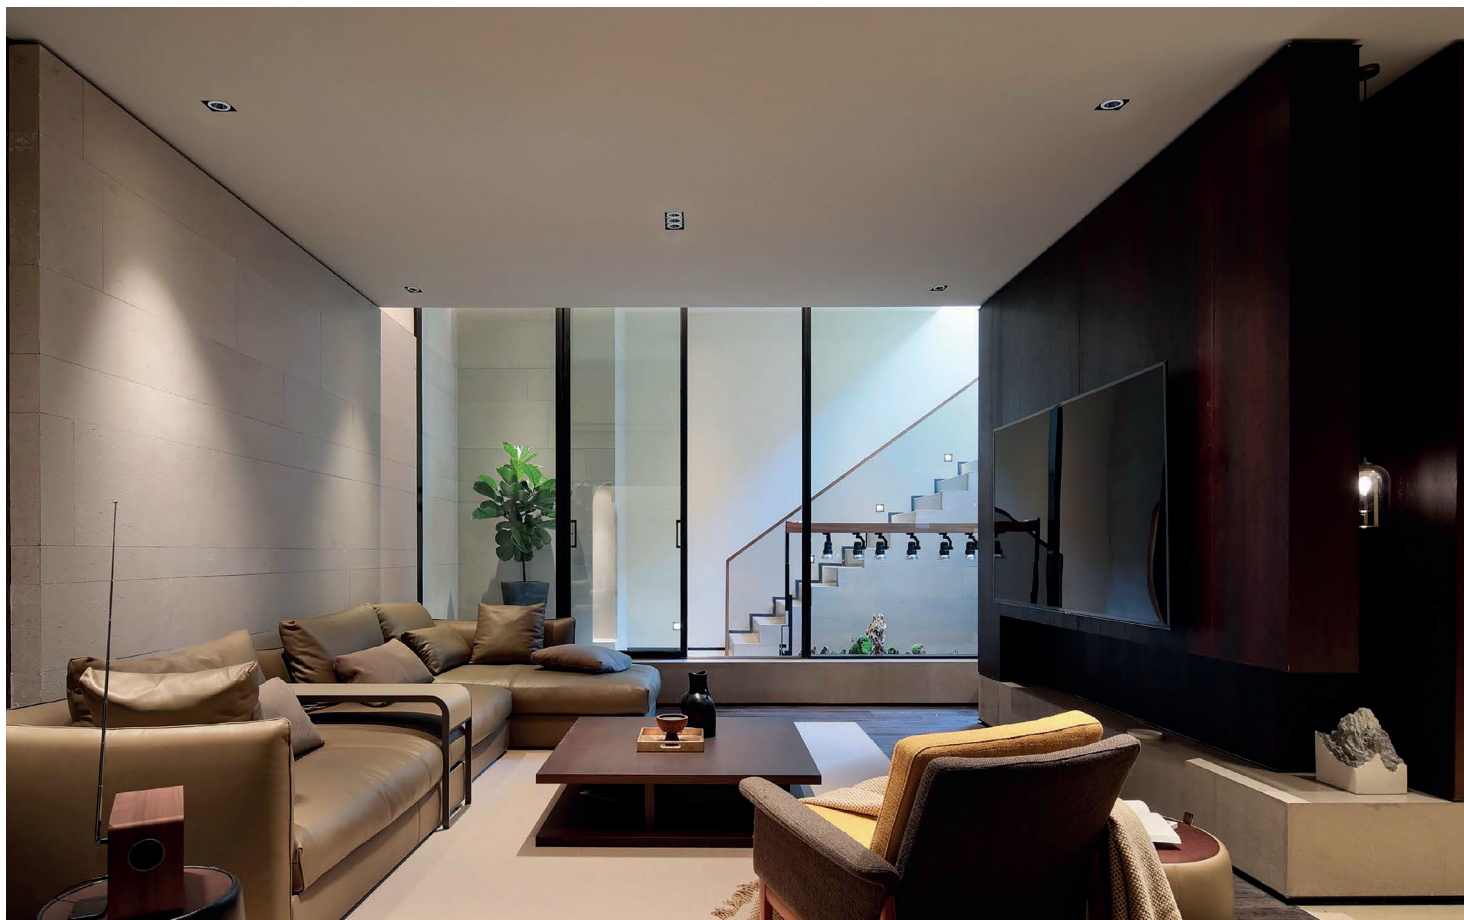


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	
LX-DL-2921	5W	282-360lm	2700K	15°/20°/25°/30°	IP20/IP54	L92*H92*W80mm	
		321-390lm	3000K				
	7W	338-432lm	2700K				
		383-468lm	3000K				
LX-DL-21301	8W	621-671lm	2700K	15°/24°/38°		IP20/IP54	L130*H130*W125mm
		642-693lm	3000K				
	10W	696-789lm	2700K				
		753-799lm	3000K				
	12W	821-932lm	2700K				
		837-888lm	3000K				
15W	889-1020lm	2700K					
	939-1033lm	3000K					
LX-DL-2922	2*5W	564-720lm	2700K	15°/20°/25°/30°	IP20/IP54	L184*H92*W80mm	
		642-780lm	3000K				
	2*7W	676-864lm	2700K				
		766-936lm	3000K				
LX-DL-21302	2*8W	1242-1342lm	2700K	15°/24°/38°		IP20/IP54	L242*H130*W125mm
		1284-1386lm	3000K				
	2*10W	1392-1578lm	2700K				
		1506-1598lm	3000K				
	2*12W	1642-1864lm	2700K				
		1674-1776lm	3000K				
2*15W	1778-2040lm	2700K					
	1878-2066lm	3000K					
LX-DL-2923	3*5W	846-1080lm	2700K	15°/20°/25°/30°	IP20/IP54	L269*H92*W80mm	
		963-1170lm	3000K				
	3*7W	1014-1296lm	2700K				
		1149-1404lm	3000K				
LX-DL-21303	3*8W	1863-2013lm	2700K	15°/24°/38°		IP20/IP54	L356*H130*W125mm
		1926-2079lm	3000K				
	3*10W	2088-2367lm	2700K				
		2259-2367lm	3000K				
	3*12W	2463-2796lm	2700K				
		2511-2664lm	3000K				
3*15W	2667-3060lm	2700K					
	2817-3099lm	3000K					

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features

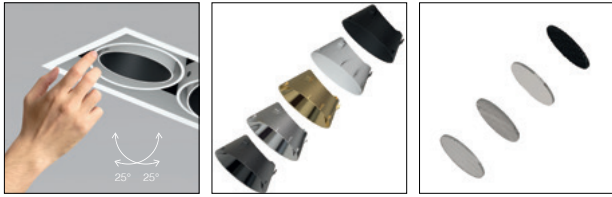

Dimensions

