


DOWNLIGHT

GRIDIX W

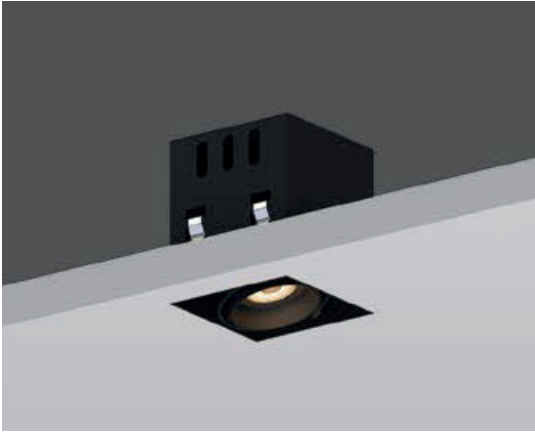

IP 20	CRI >90	AC220-240V	Anti-Glare	No Flicker
-----------------	-------------------	-------------------	-------------------	-------------------

PHASE	1-10V	ball	Bluetooth
--------------	--------------	-------------	------------------

3 GARANTIE	CITIZEN Micro-Componente	CE	RoHS	50000h@L80
----------------------	------------------------------------	-----------	-------------	-------------------

GRIDIX

The single / double / triple heads universal adjustable angle design can help you to project light onto object more accurately, high lighting a single area or object.


Applications : Hotels, Shopping centers, Restaurants, Galleries, Large architectural structures, Retail stores, Showrooms, Bars, etc.

Physical : Aluminum

Colour(housing) : Black / White

Colour(reflector) : Black

Colour temperature : 2700K, 3000K, 4000K, 5000K

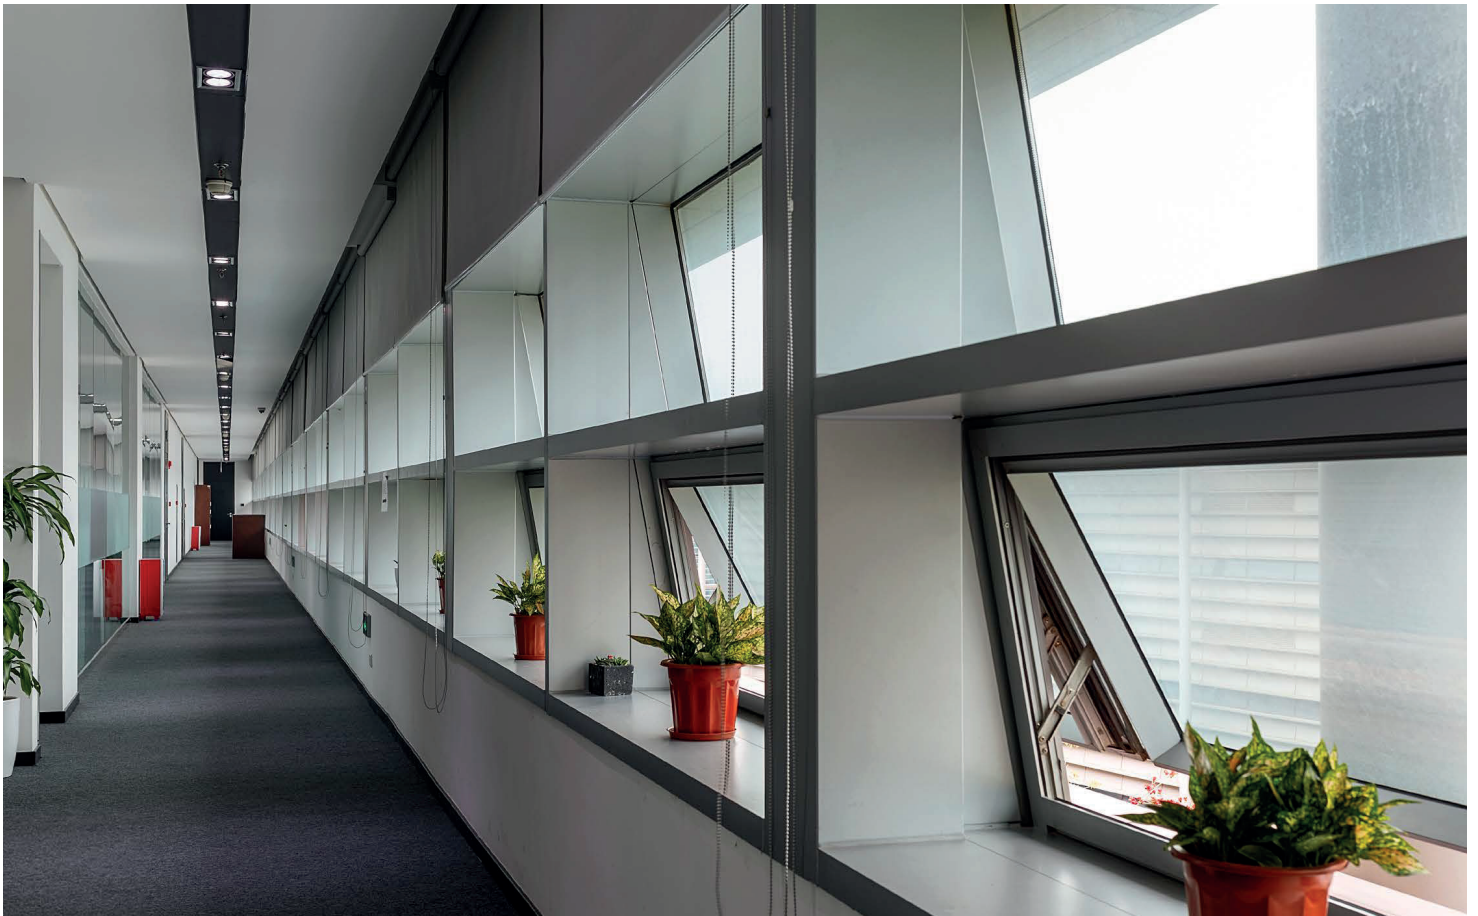

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions				
LX-DL-W2761	8W	664-693lm	2700K	15°/24°/40°	IP20	L94*H94*W102mm				
		687-727lm	3000K							
	12W	832-868lm	2700K			L94*H94*W118mm				
		863-921lm	3000K							
LX-DL-W2762	2*8W	1328-1386lm	2700K			15°/24°/40°	IP20	L190*H94*W102mm		
		1374-1454lm	3000K							
	2*12W	1664-1736lm	2700K					L190*H94*W118mm		
		1726-1842lm	3000K							
LX-DL-W2763	3*8W	1992-2079lm	2700K					15°/24°/40°	IP20	L275*H94*W102mm
		2061-2181lm	3000K							
	3*12W	2496-2604lm	2700K							L275*H94*W118mm
		2589-2763lm	3000K							

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions

