



# DOWNLIGHT

## GRIDIX

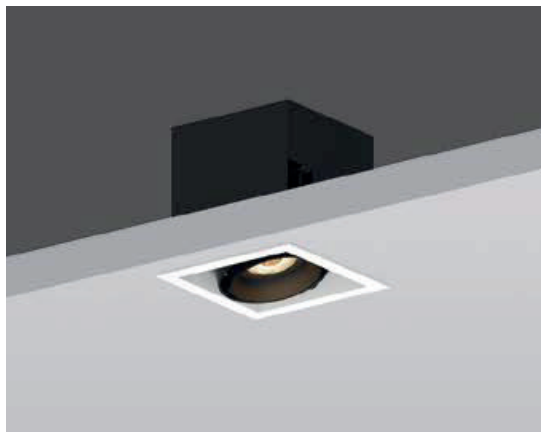

### GRIDIX

The single / double / triple heads universal adjustable angle design can help you to project light onto object more accurately, high lighting a single area or object.


Applications : Hotels, Shopping centers, Restaurants, Galleries, Large architectural structures, Retail stores, Showrooms, Bars, etc.

Physical : Aluminum

Colour(housing) : Black / White

Colour(reflector) : Black

Colour temperature : 2700K, 3000K, 4000K, 5000K

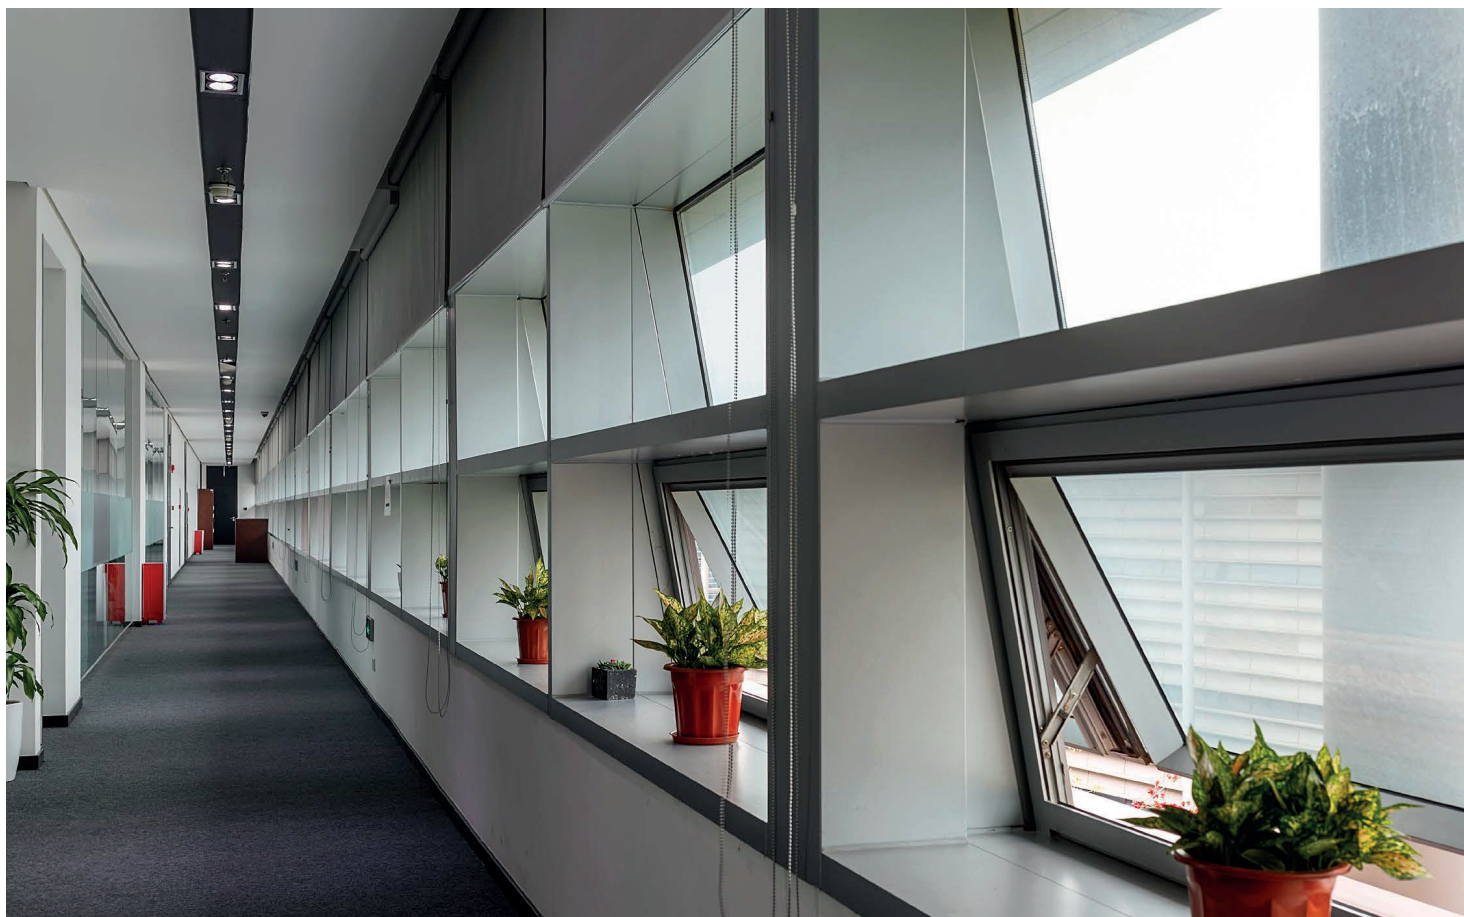

## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions		
LX-DL-2161	8W	664-693lm	2700K	15°/24°/40°	IP20	L103*H103*W105mm		
		687-727lm	3000K					
	12W	832-868lm	2700K			L103*H103*W120mm		
		863-921lm	3000K					
LX-DL-2162	2*8W	1328-1386lm	2700K			L200*H103*W105mm		
		1374-1454lm	3000K					
	2*12W	1664-1736lm	2700K				L200*H103*W120mm	
		1726-1842lm	3000K					
LX-DL-2163	3*8W	1992-2079lm	2700K				L285*H103*W105mm	
		2061-2081lm	3000K					
	3*12W	2496-2604lm	2700K					L285*H103*W120mm
		2589-2763lm	3000K					

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Dimensions

