INFINITY S

IP 20	CRI >90	AC220-240V	Anti-Glare	No Flicker

Optional

PHASE	1-10V	DALI	Bluetooth

3 GARANTIE	CITIZEN Micro HumanTech	CE	RoHS	50000h@L80

INFINITY S

The two and one direct lighting design and unique square design make lighting and the ceiling have more outstanding coordination, which can help you make more excellent designs. Applications : Hotels, Clubs, Bars, Restaurants, Conference centers, Residences, Shopping malls, etc.

Physical : Aluminum

Colour(housing) : Black

Colour(reflector) : White, Black, Gold

luxio
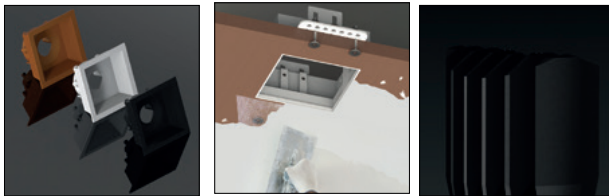L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-1641	8W	610-623lm	3000K	21°/35°	IP20	64*64*86mm	——
LX-DL-11221	2*8W	1220-1246lm				64*122*86mm	
LX-DL-11691	2*12W	1744-1858lm		20°/30°/52°		80*169*104mm	

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features

Dimensions

Cut-out:58x58mm
thickness 5-20mm
86mm
64mm 64mm
LX-DL-1641(trim)

Cut-out:116x58mm
thickness 5-20mm
86mm
64mm 122mm
LX-DL-11221(trim)

Cut-out:158x80mm
thickness 5-20mm
104mm
80mm 169mm
LX-DL-11691(trim)