

# GARDEN LIGHT



LX-FL-92

<b>IP</b> 66	<b>IK</b> 05/06	<b>DC24V</b>	<b>TRIAC</b>	<b>PMW</b>		
-----------------	--------------------	--------------	--------------	------------	--	--

			<b>RoHS</b>	<b>50000h</b>
--	--	--	-------------	---------------

<b>Housing</b>	Extruded aluminum, powder coated
<b>Lens</b>	Optical lens, efficiency ≥85%
<b>Light Window</b>	Tempered glass, T=4mm
<b>Cable gland</b>	IP-68 PG-9 PA66
<b>Gasket</b>	Glass and housing are silicone sealed
<b>LED</b>	NICHIA SMD 3535
<b>Operating temperature</b>	-20°C~40°C
<b>Power Cable</b>	H05RN-F 2×1.0mm <sup>2</sup> L=2.0m
<b>SPIKE</b>	ABS spike 7C



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-FL-92	27W	3pcs	DC24V	1745lm	3000K/6000K	15°/30°/15°*30° /15°*45°	IP66	L248*W38*H345mm
	12W	6pcs		677lm		15°/20°/20°/50°		L262*W50*H395mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic


Important : All the specification can be customized as per the project request .

## Housing color option




## Adjustable beam direction

Approximately

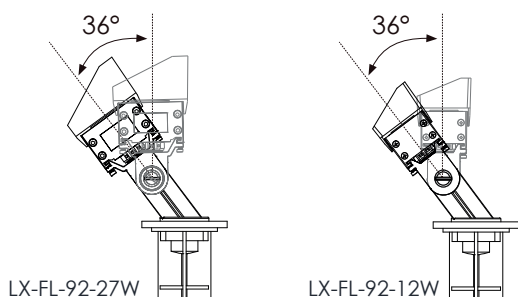

## Water proof solution

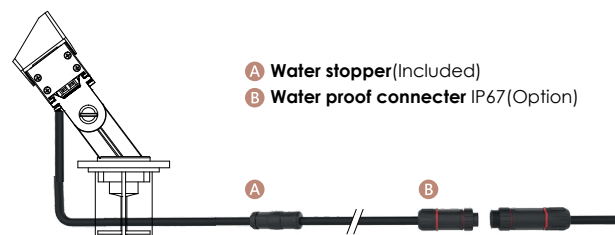

## Dimensions

