

# GARDEN LIGHT



## LX-FL-B3-EFG



AC120-240V  
/DC24V



**HOUSING** 12# Die-casting dark grey powder coated aluminum.  
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

**LIGHT WINDOW** Tempered glass, T=3mm

**LED** NICHIA

**LED DRIVER** Constant Voltage Input, Constant Current Output

**CABLE GLAND** IP68 PG-9 PA66

**GASKET** Tooling shaped seal

**POWER CABLE** H05RN-F 2×1.0mm<sup>2</sup> L=2.0m (low voltage)  
H05RN-F 3×1.0mm<sup>2</sup> L=2.0m (high voltage)

**DIMMABLE SUPPORT**



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-FL-B3-EFG-17W	17W	4pcs	AC120-240V /DC24V	1206lm	3000K/4000K/5700K	9°/15°/20°/30°/45° /60°	IP66	120*H190.7*W75mm
LX-FL-B3-EFG-30W	30W	9pcs		2541lm				160*H238.4*W80mm
LX-FL-B3-EFG-82W	82W	25pcs		5832lm				250*H347.9*W100mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option



## Water proof solution



## Feature



**Gear:** The gear between the luminaire housing and the U bracket to prevent sliding.




## Dimensions

LX-FL-B3-EFG-17W



LX-FL-B3-EFG-30W

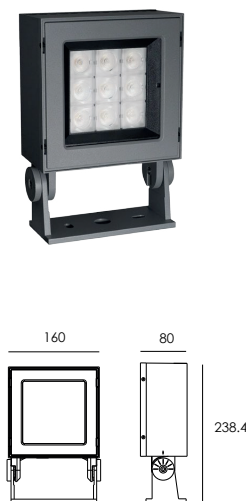

LX-FL-B3-EFG-82W

