

# GARDEN LIGHT



## LX-FL-B3C-KU

<b>IP</b> 66	<b>IK</b> 07	<b>AC120-240V</b>
-----------------	-----------------	-------------------



**HOUSING** 12# Die-casting dark grey powder coated aluminum.  
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

**LIGHT WINDOW** Tempered glass. T=3mm

**LED** NICHIA

**LED DRIVER** Constant Voltage Input, Constant Current Output

**CABLE GLAND** IP68 PG-9 PA66

**GASKET** Tooling shaped seal

**POWER CABLE** H05RN-F 2X1.0mm<sup>2</sup> L=2 m (low voltage)  
H05RN-F 3X1.0mm<sup>2</sup> L=2 m (high voltage)

**DIMMABLE SUPPORT** Triac PWM 1-10V Dali



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)


## References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-FL-B3C-KU	85W	16pcs	AC120-240V	6179lm	3000K/4000K/6000K	6°/15°/24°/36°/45° /55°/10°*38°	IP66	Ø284.6*H377.8*W328mm


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option



## Water proof solution

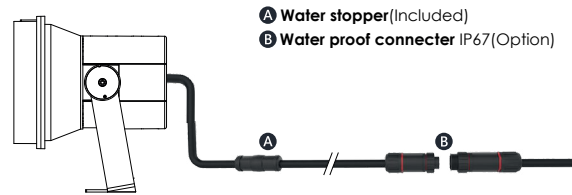

## Dimensions

