

GARDEN LIGHT



LX-FL-B3DVUW

IP 65	DC24V/ 120-240V	TRIAC	PMW	1-10V	
----------	--------------------	-------	-----	-------	---

				50000h
---	--	---	---	--------

HOUSING	12# Die-casting dark grey powder coated aluminum. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered glass.T=3mm
LED	NICHIA
LED DRIVER	Constant Voltage Input,Constant Current Output
CABLE GLAND	IP68 PG-9 PA66
GASKET	Tooling shaped seal
POWER CABLE	H05RN-F 2×1.0mm ² L=2.0m(low voltage) H05RN-F 3×1.0mm ² L=2.0m(high voltage)



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-FL-B3DVUW067	8W	1pc	DC24V/ 120-240V	540lm	3000K/6000K	6°	IP65	W150*L70*H125mm
LX-FL-B3DVUW027	8W			792lm		15°/24°/33°/45°/60°		W150*L70*H125mm
LX-FL-B3DVUW460	16W	4pcs		1227lm		9°/15°/20°/30°/45°/60°		W170*L95*H158mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option



Accessories(Optional)

PC/ABS alloys SPIKE




- 18C: LX-FL-B3DVUW067-8W
LX-FL-B3DVUW027-8W
17B: LX-FL-B3DVUW460-16W
- More information please refer to p.92

STAINLESS STEEL SPIKE




- 12C: LX-FL-B3DVUW067-8W
LX-FL-B3DVUW027-8W
13B: LX-FL-B3DVUW460-16W
- More information please refer to p.93

MOUNTING BASE



- BS002: LX-FL-B3DVUW067-8W
LX-FL-B3DVUW027-8W
BS003: LX-FL-B3DVUW460-16W

Water proof solution

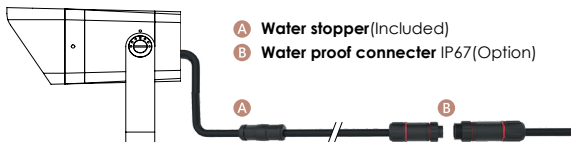


Overview



Dimensions

LX-FL-B3DVUW067 / LX-FL-B3DVUW027

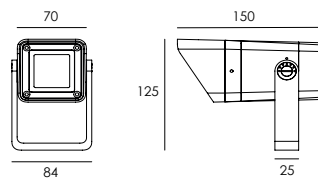

LX-FL-B3DVUW460

