

GARDEN LIGHT



LX-FL-C3-ME

IP
66

AC120-240V
/DC24V



HOUSING 12# Die-casting dark grey powder coated aluminum.
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

LIGHT WINDOW Tempered glass, T=3mm

LED NICHIA

LED DRIVER Constant Voltage Input, Constant Current Output

CABLE GLAND IP68 PG-9 PA66

GASKET Tooling shaped seal

POWER CABLE H05RN-F 2×1.0mm² L=2.0m (low voltage)
H05RN-F 3×1.0mm² L=2.0m (high voltage)



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-FL-C3-ME	12W	4pcs	AC120-240V /DC24V	520lm	3000K/4000K/5700K	65°×55°	IP66	L120*H190.7*W75mm
	20W	10pcs		680lm		85°×55°		L160*H238.4*W80mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option



Water proof solution




Feature



Gear: The gear between the luminaire housing and the U bracket to prevent sliding.




Light application

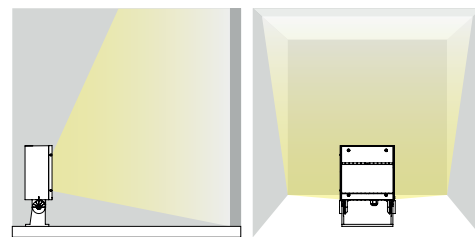

Dimensions

LX-FL-C3-ME-12W



LX-FL-C3-ME-20W

