

# GARDEN LIGHT



## LX-G-B3D-VW

<b>IP</b> 65	<b>DC24V/ 120-240V</b>	<b>TRIAC</b>	<b>PMW</b>	<b>1-10V</b>	
-----------------	----------------------------	--------------	------------	--------------	--

			<b>RoHS</b>	<b>50000h</b>
--	--	--	-------------	---------------

<b>HOUSING</b>	12# Die-casting dark grey powder coated aluminum. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
<b>LIGHT WINDOW</b>	Tempered glass.T=3mm
<b>LED</b>	NICHIA
<b>LED DRIVER</b>	Constant Voltage Input,Constant Current Output
<b>CABLE GLAND</b>	IP68 PG-9 PA66
<b>GASKET</b>	Tooling shaped seal
<b>POWER CABLE</b>	H05RN-F 2×1.0mm <sup>2</sup> L=2.0m(low voltage) H05RN-F 3×1.0mm <sup>2</sup> L=2.0m(high voltage)



**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-G-B3D-VW	6W	1pc	DC24V/ 120-240V	442-540lm	3000K/6000K	6°	IP65	W150*L70*H340mm
	8W			792lm		15°/24°/33°/45°/60°		W150*L70*H340mm
	16W	4pcs		1227lm		9°/15°/20°/30°/45°/60°		W170*L95*H372.7mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option




## Accessories(Optional)

### STAINLESS STEEL SPIKE



- 12A: LX-G-B3D-VW-6W  
LX-G-B3D-VW-8W  
LX-G-B3D-VW-16W
- More information please refer to p.93


### TREE POLE STRAP




- RD003: LX-G-B3D-VW-6W  
LX-G-B3D-VW-8W  
RD002: LX-G-B3D-VW-16W
- More information please refer to p.94

## Adjustable beam direction

Approximately

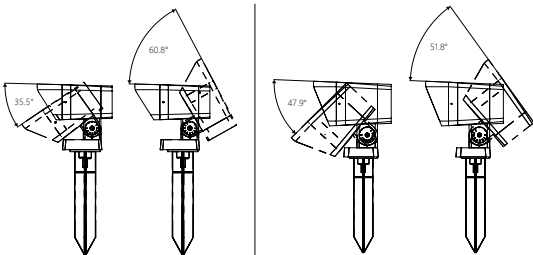


## Water proof solution

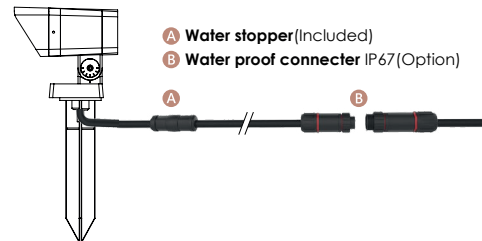

## Dimensions

LX-G-B3D-VW-6W / LX-G-B3D-VW-8W

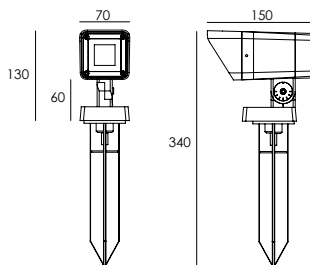

LX-G-B3D-VW-16W

