TRACK LIGHT

Black

LX-LS-R-type track

LX-LS-R-type track

- It can realize 48VDC power supply
- In two installation modes of suspension rope and suspender
- The orbit can rotate vertically ±20 degrees

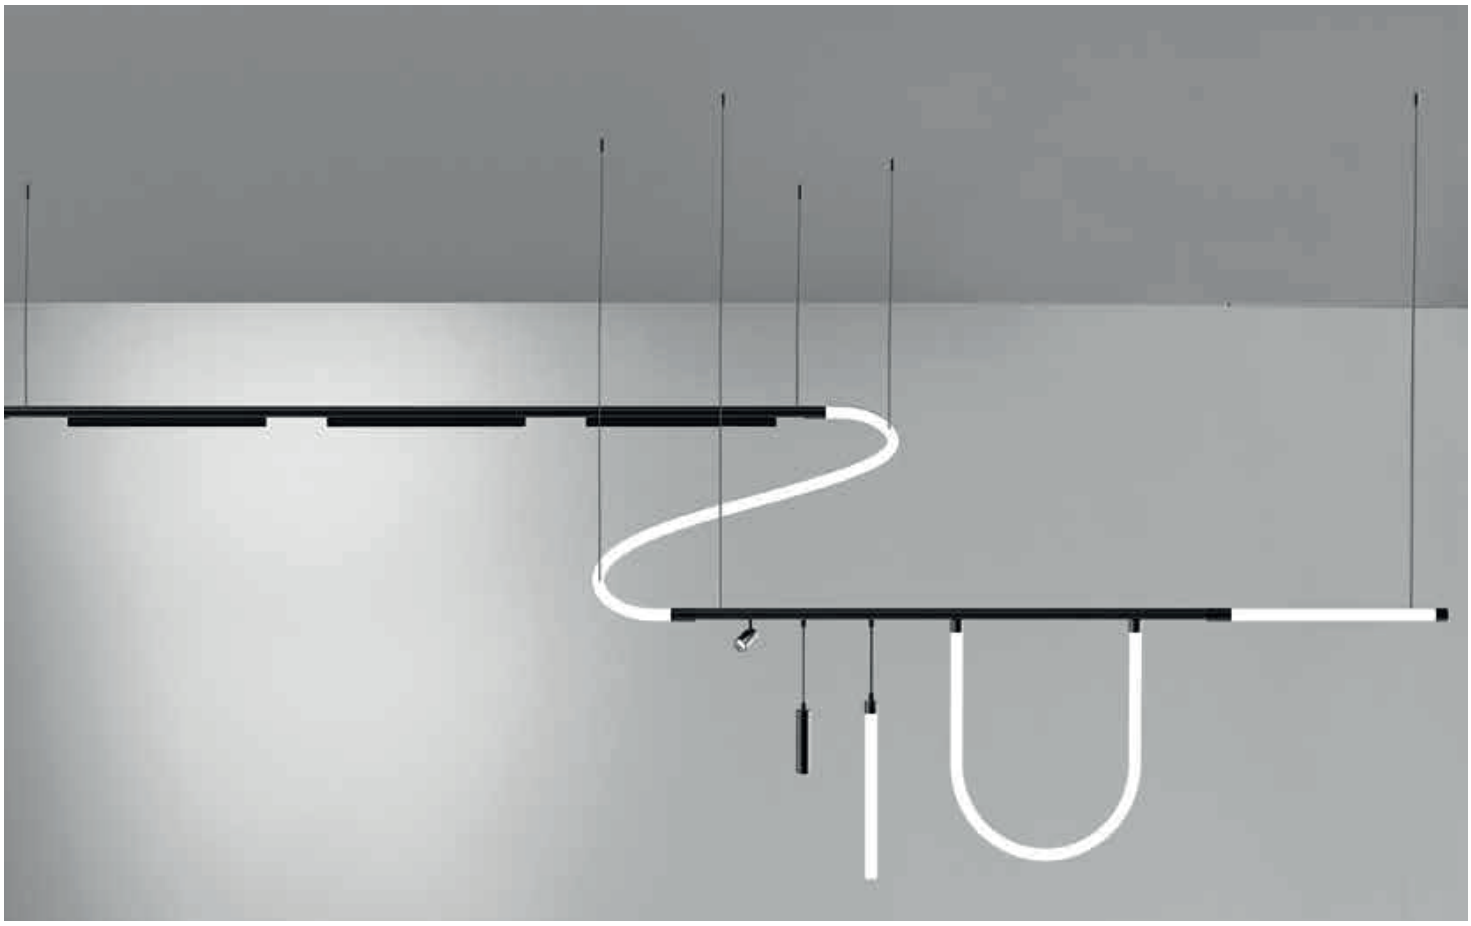

luxio LIGHTING

www.luxio-lighting.com

Product parameters	
Installation	Suspended / Surface mounted
Input voltage	48VDC
Maximum load	500W
Length of track	1m LX-LS-R610-B 2m LX-LS-R620-B 3m LX-LS-R630-B
Appearance	Black
Certification	CE/RoHS

Electrical connection Accessories		
Power feeder unit of track	LX-LS-R862-B	
Female end cap	LX-LS-R865-B	
End cap	LX-LS-R600A-B	
Endcap(Without Wire locker)	LX-LS-R600B-B	
End cap(Without Wire locker and Pendant cable)	LX-LS-R600C-B	
Power feeder of neon double-sided magnetic module	LX-LS-R864-B	

Interconnection Accessories		
Rotatable connector	LX-LS-R860A-B	
Turned connector (Without Wire locker)	LX-LS-R860B-B	
Turned connector (Without Wire locker and Pendant cable)	LX-LS-R860C-B	
Straight connector	LX-LS-R861A-B	
Straight connector (Without Wire locker)	LX-LS-R861B-B	
Straight connector (Without Wire locker and Pendant cable)	LX-LS-R861C-B	
I-shaped electrical connector	LX-LS-R863-B	
180°splicing bar	LX-EX-E1-S	

Installation Accessories		
Pendant cable (Track)	LX-PNA-SA2	
Pendant rod (Track)	LX-LS-R891-B	
Pendant cable (Neon)	LX-LS-R892	
Pendant rod (Neon)	LX-LS-R893-B	

Dimension

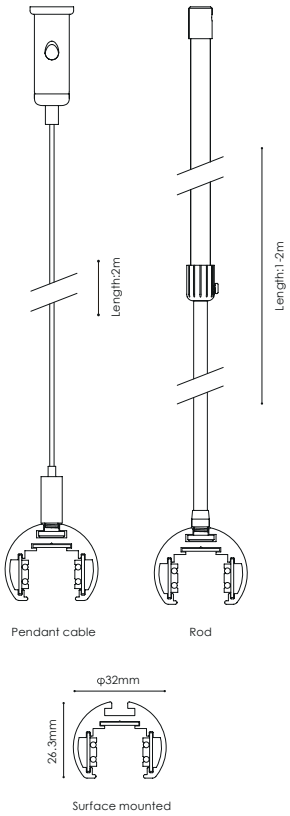

Fixings



www.luxio-lighting.com