

# DOWNLIGHT

## LYRA



<b>IP</b> 20	<b>CRI</b> RA>90	<b>AC220-240V</b>
-----------------	---------------------	-------------------




### LYRA DOWNLIGHT

Product range: 15W/36W.

Surface mounting.

Precise beam angle: 12° /23° /38° /50° .

Optional black/white finishing.

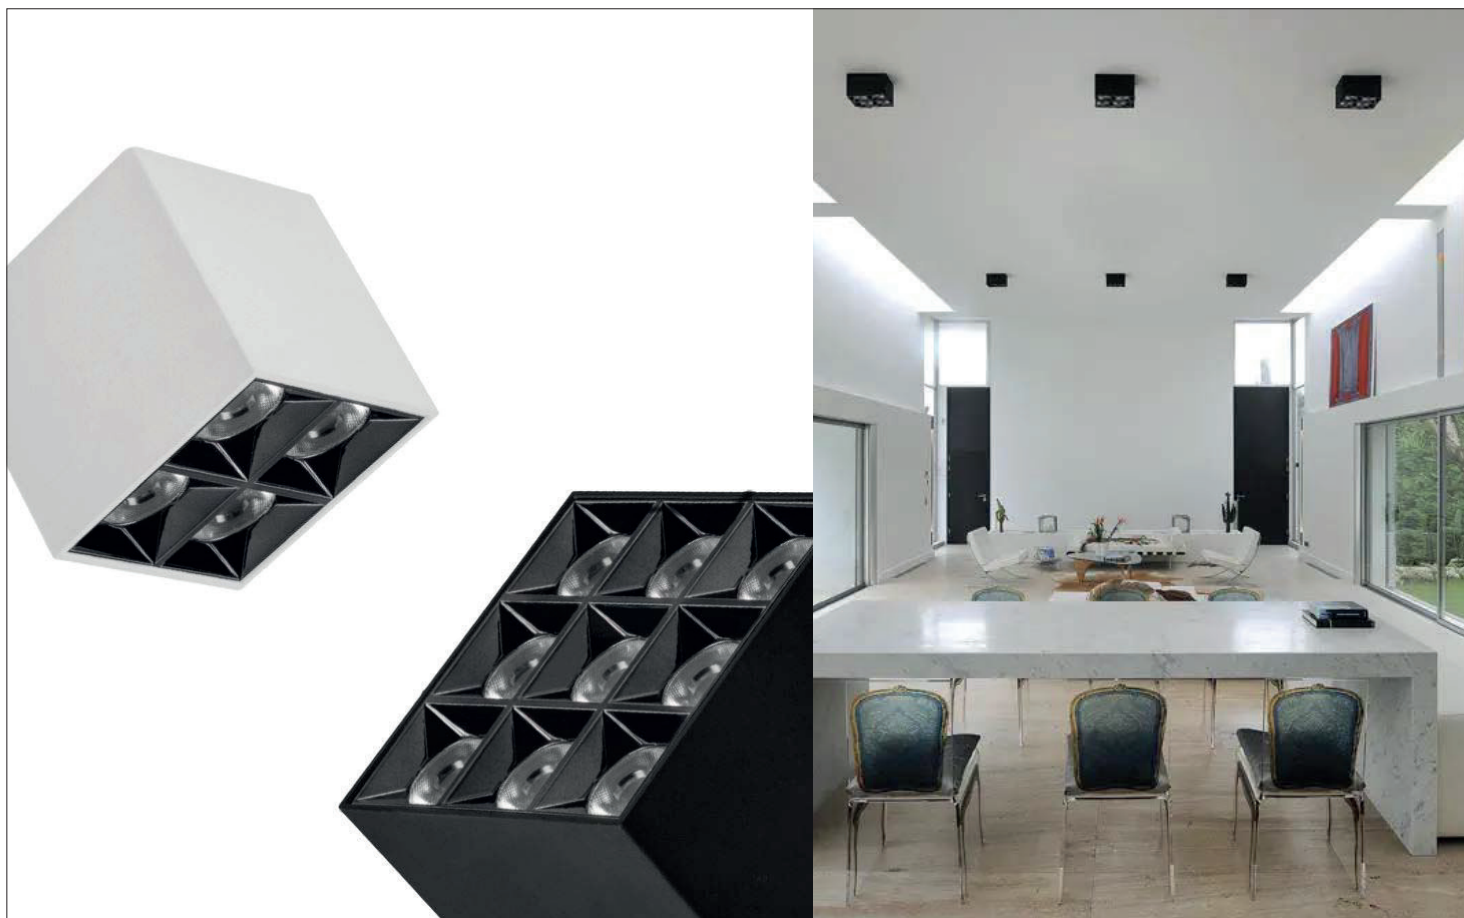

## References

Reference	Led Power	Luminous flux	Input Voltage	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-15082FS	15W	975lm	AC220-240V	2700K/3000K/4000K	12°/23°/38°/50°	IP20	82*80mm
LX-DL-15120FS	36W	2340lm					120*120mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Optional Color



White





Black



Grey

## Dimensions

LX-DL-15082FS



LX-DL-15120FS

