

# DOWNLIGHT



## MEGA

<b>IP</b> 20	<b>CRI</b> 90+	<b>PF</b> ≥0.9	<b>AC220-240V</b>	<b>Dimmable</b>	<b>Anti-Glare</b>
-----------------	-------------------	-------------------	-------------------	-----------------	-------------------



### MEGA DOWNLIGHT

- 1 - Mini size in 33mm/45mm/60mm.
- 2 - Precise beam angles in 15°/24°/36° with smooth and concentric speckle.
- 3 - Different mounting types: track mounting, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless. Anti-glare structure for maximum eye comfort.
- 4 - Special design in vertical texture suits for decorative style. Aluminum, with painting finishing



## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-0407A	1*7W	420lm	2700K/3000K/4000K	15° / 24° / 36° / Random beam angle:15°~36°	IP20	Ø45xH153mm	90°
LX-DL-0418A	1*18W	1080lm				Ø60xH244mm	
LX-DL-0514A	2*7W	820lm				Ø45xH153mm	
LX-DL-0536A	2*18W	2160lm				Ø60xH244mm	


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## OPTICS




## HOUSING IN DIFFERENT COLOR

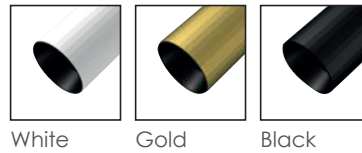


## Dimensions


LX-DL-0407A

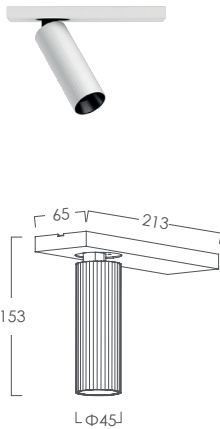


LX-DL-0418A

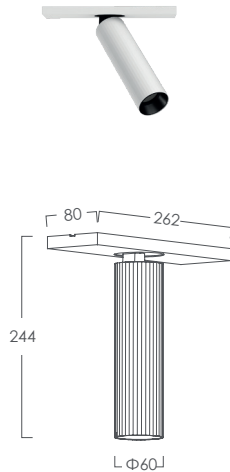

LX-DL-0514A

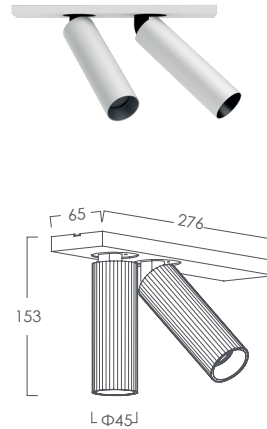

LX-DL-0536A

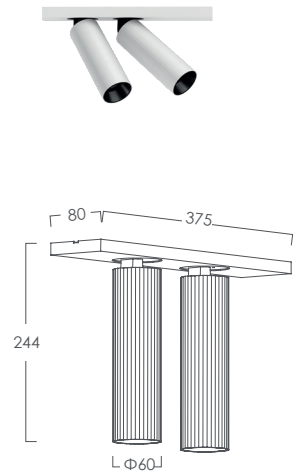

## Features

The diagram illustrates the adjustable beam angle feature of a Luxio lighting fixture. A central screwdriver is shown inserted into the fixture, with curved arrows indicating the range of beam angles: 15°, 24°, and 36°. A dashed line shows the beam angle being adjusted to illuminate a bust of a man's head. The fixture has a diameter of  $\Phi 45\text{mm}$ . Two inset images show the internal mechanism: one for fixed angles (15°, 24°, 36°) and one for adjustable angles (15°~36°).

**Adjustable beam angle**

15°  
24°  
36°

$\Phi 45\text{mm}$

Beam angle can be freely adjusted from 15°~36° via screw driver

Fixed angle : 15° / 24° / 36°

Adjustable beam angle 15°~36°