

# DOWNLIGHT



## MIGNON P

<b>IP</b> 20	<b>CRI</b> >90	<b>AC220-240V</b>	<b>Anti-Glare</b>	<b>No Flicker</b>
-----------------	-------------------	-------------------	-------------------	-------------------

<b>PHASE</b>	<b>1-10V</b>	<b>COB LED</b>	<b>Bluetooth</b>
--------------	--------------	----------------	------------------

<b>3</b> GARANTIE	<b>LUMENS</b>	<b>CE</b>	<b>RoHS</b>	<b>50000h@L80</b>
----------------------	---------------	-----------	-------------	-------------------

### MIGNON P

Single head surface mounted design, COB LED adjustable and flexible, suitable for places without ceiling, and can help you accurately project light on objects, highlighting a single area or object.

Applications : Shopping centers, Museums, Galleries, Exhibition halls, Apartments, etc.

Physical : Aluminum

Colour(housing) : black

Colour(reflector) : White, Black, Gold

Colour temperature : 2700K, 3000K, 4000K, 5000K




## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-8602	8W	378-394lm	3000K	20°/24°/38°/52°	IP20	( $\varnothing 60 \times 90 \text{mm}$ ) / ( $\varnothing 60 \times 30 \text{mm}$ )
LX-DL-2602						( $\varnothing 60 \times 90 \text{mm}$ ) / ( $\varnothing 80 \times 38 \text{mm}$ )

Order code : Reference - Power - Luminous flux - CCT/K - Optic


Important : All the specification can be customized as per the project request .

## Features

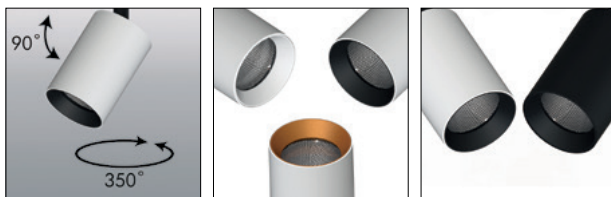

## Dimensions

LX-DL-8602



LX-DL-2602



Cut-out:  $\varnothing 68 \text{mm}$

