


DOWNLIGHT



NEBULE SQUARE & GRILLE

IP 20	CRI RA>90	AC220-240V
-----------------	---------------------	-------------------

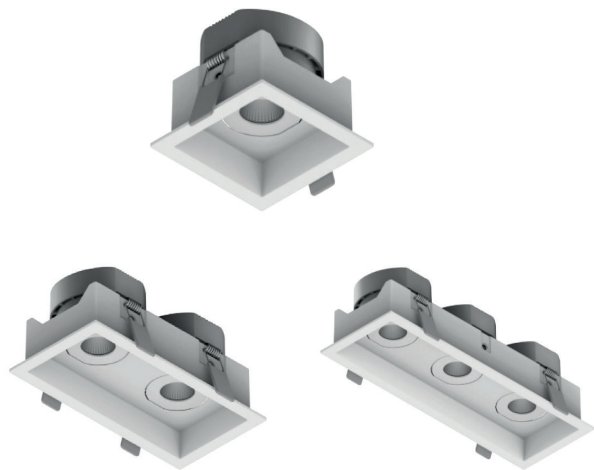

NEBULE DOWNLIGHT


Anti-glare construction for visual comfort.

Precise beam angle: 15° /24° /36° 6°.

Adjustable spot light with soft and cosy lighting distribution.

High performance heat dissipator allows LED chip to work with a longer lifetime.

Solutions to meet different needs of my space, living room, bedroom and other home space as well as stores, offices, restaurants, hotels and other scenes.

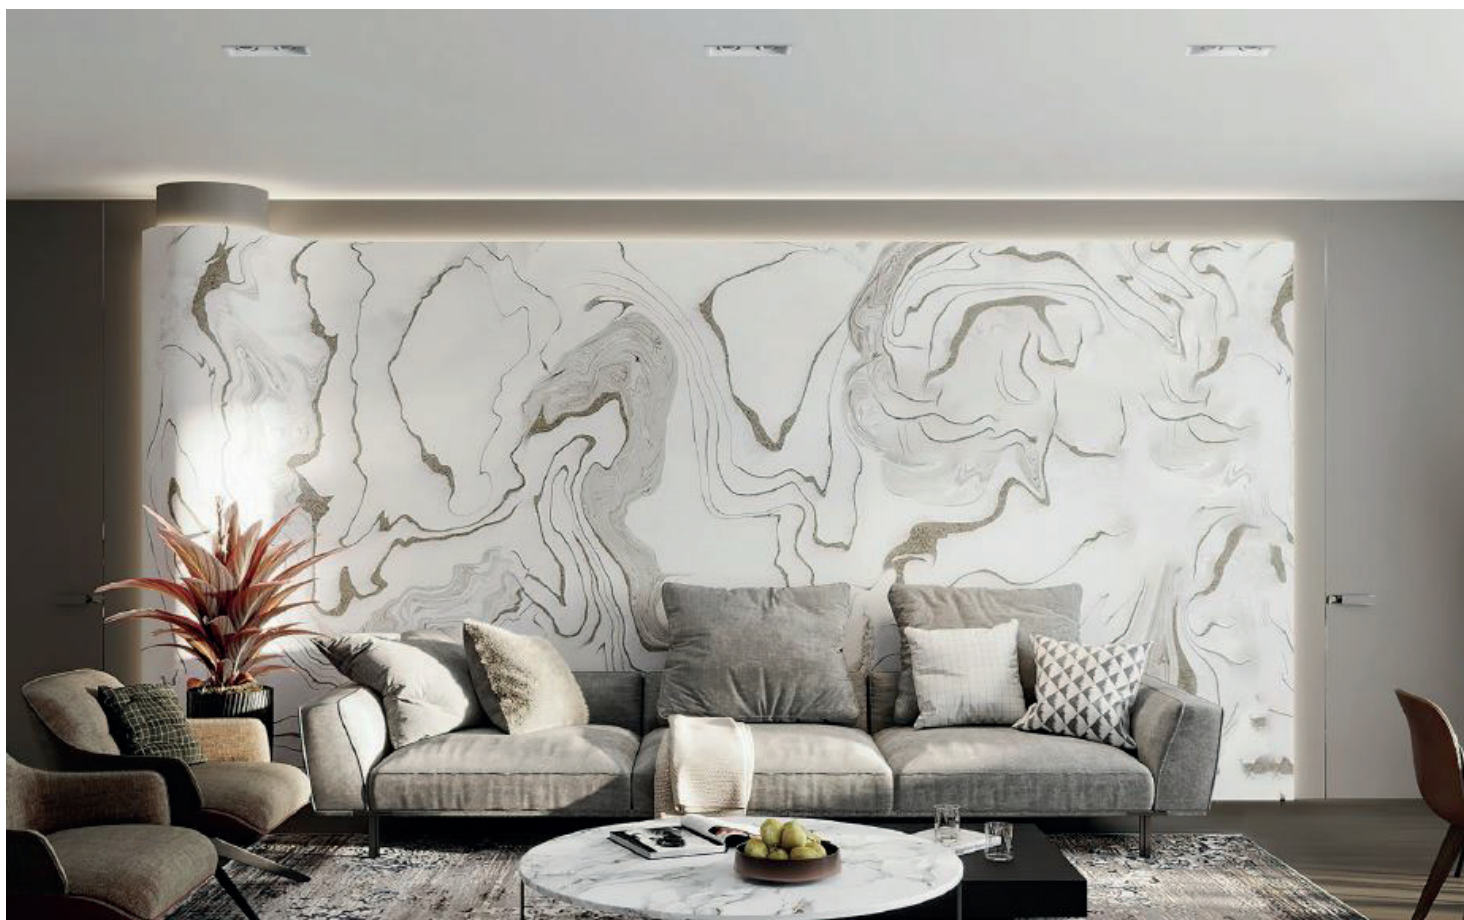

luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-08060AS	6W	390lm	2700K/3000K/4000K	24°/36°	IP20	72*72*62mm
LX-DL-08075AS	12W	780lm		15°/24°/36°		88*88*71mm
LX-DL-08090AS	18W	1170lm		24°/36°		102*102*86mm
LX-DL-08260AS	2*6W	2*390lm		15°/24°/36°		142*72*62mm
LX-DL-08275AS	2*12W	2*780lm		24°/36°		173*88*71mm
LX-DL-08290AS	2*18W	2*1170lm		15°/24°/36°		210*102*86mm
LX-DL-08360AS	3*6W	3*390lm		24°/36°		212*72*62mm
LX-DL-08375AS	3*12W	3*780lm		15°/24°/36°		253*88*71mm
LX-DL-08390AS	3*18W	3*1170lm				312*102*86mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTIONAL COLOR




White


Black

Dimensions


LX-DL-08060AS

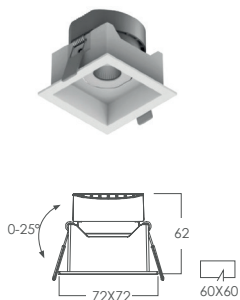


LX-DL-08075AS

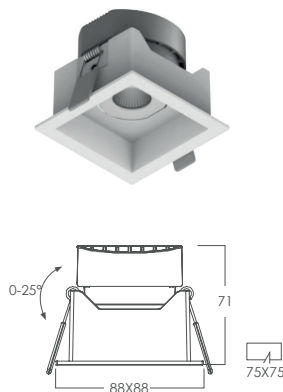


LX-DL-08090AS

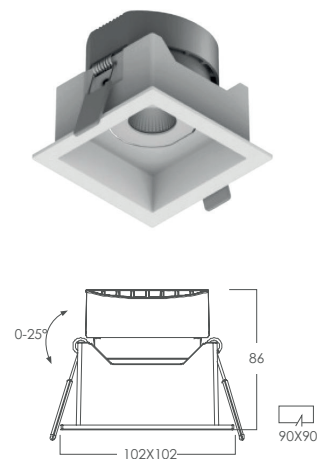



LX-DL-08260AS




LX-DL-08275AS

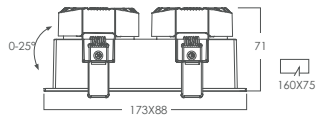


LX-DL-08290AS

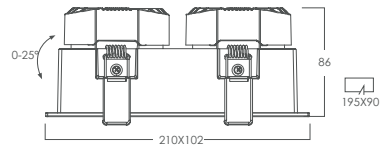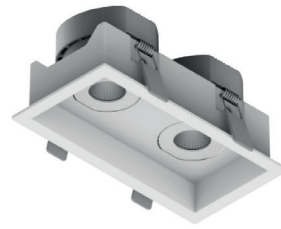

LX-DL-08360AS



LX-DL-08375AS



LX-DL-08390AS

