

# DOWNLIGHT



## ORION

<b>IP</b> 20	<b>CRI</b> RA>90	<b>AC220-240V</b>
-----------------	---------------------	-------------------



### ORION DOWNLIGHT

Multiple options : Round/Square. Single/Double/Triple.

Precise beam angle : 15°/24°/36°/6°

High performance heat dissipator ensures a long product lifetime.

Flexible tilting angle up to 25 degree.

Minimize the damage offase ceiling.



## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-10075A	7W	490lm	2700K/3000K/4000K	15°/24°/36°	IP20	Ø85*59mm
LX-DL-10095A	12W	840lm				Ø105*69mm
LX-DL-10075AS	7W	490lm				85*85*59mm
LX-DL-10095AS	12W	840lm				105*105*69mm
LX-DL-10275AS	2*7W	2*490lm				168*85*59mm
LX-DL-10375AS	3*7W	3*490lm				200*85*59mm
LX-DL-10295AS	2*12W	2*840lm				210*105*69mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## OPTIONAL COLOR




White


Black

## Dimensions


LX-DL-10075A




LX-DL-10095A




LX-DL-10075AS





LX-DL-10095AS



LX-DL-10275AS

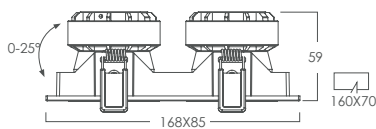

LX-DL-10375AS

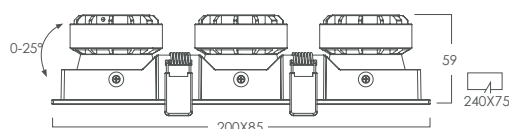

LX-DL-10295AS

