

DOWNLIGHT




POLY B

IP	CRI	PF	AC220-240V	Dimmable	Anti-Glare
20	90+	≥0.9			



POLY B DOWNLIGHT

- 1 - Mini size in 33mm/45mm/60mm.
- 2 - Precise beam angles in 15°/24°/36° with smooth and concentric speckle.
- 3 - Different mounting types: track mounting, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless. Anti-glare structure for maximum eye comfort.
- 4 - Special design in vertical texture suits for decorative style. Aluminum, with painting finishing

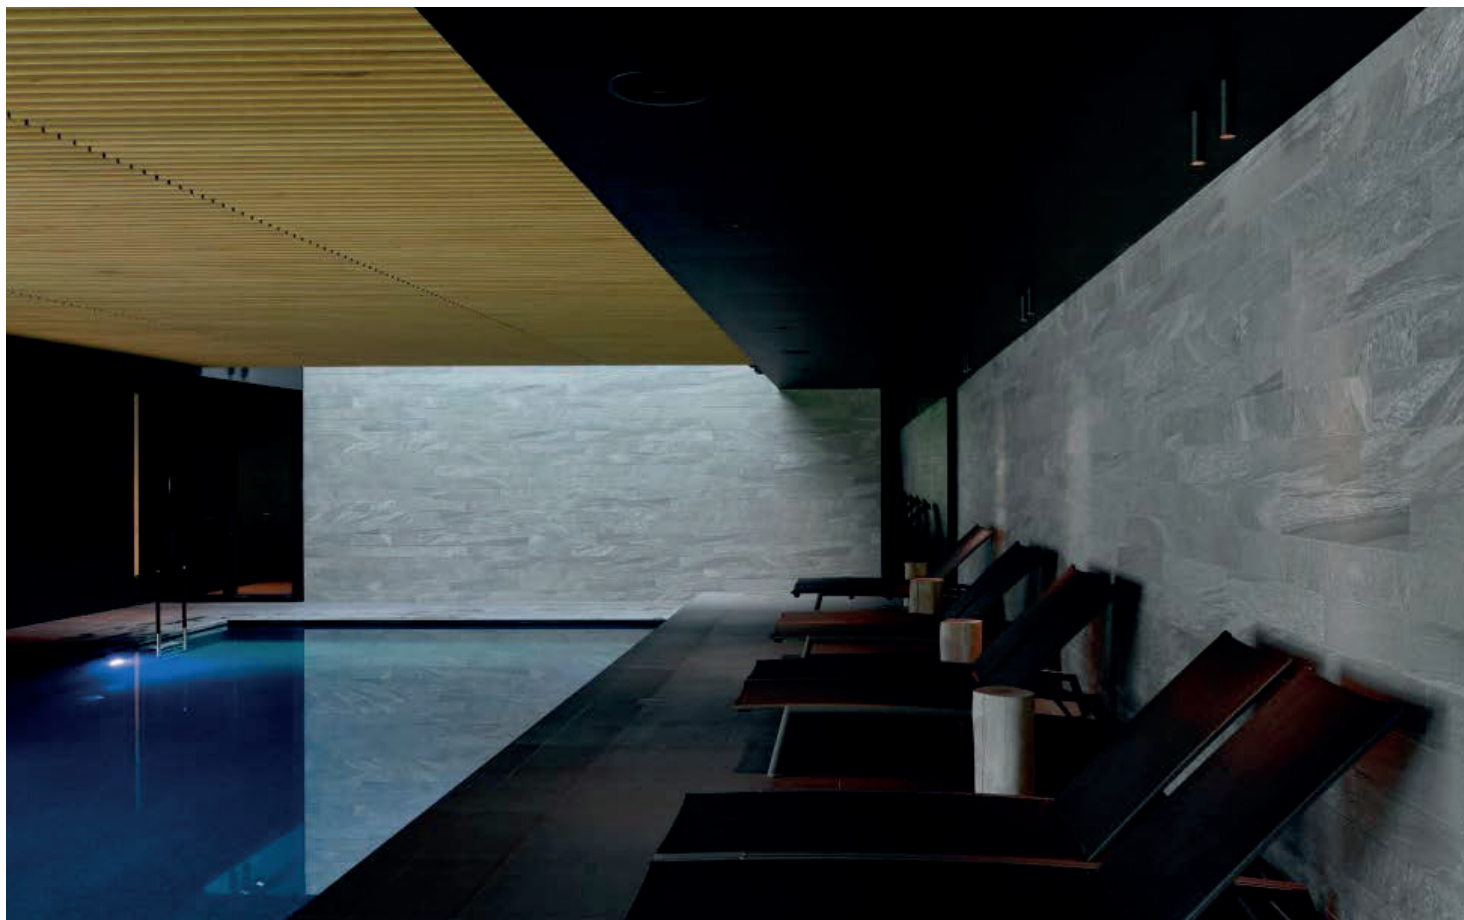


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-0603A	1*3W	180lm	2700K/3000K/3500K/4000K	15°/24°/36°/Random beam angle:15°~36°	IP20	Ø33*139mm	90°
LX-DL-0607A	1*7W	420lm				Ø45*161mm	
LX-DL-0618A	1*18W	1080lm				Ø60*255mm	


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS

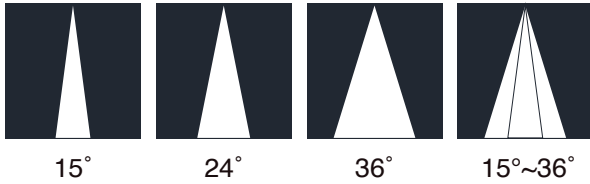


HOUSING IN DIFFERENT COLOR

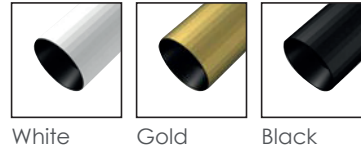


Dimensions


LX-DL-0203A



LX-DL-0207A



LX-DL-0218A

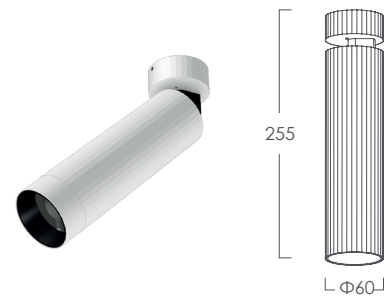

Features

The diagram illustrates the adjustable beam angle feature of a lighting fixture. A central screwdriver is shown adjusting the internal mechanism of a fixture with a diameter of $\Phi 45\text{mm}$. The beam angle can be adjusted from 15° to 36° . A classical bust is shown illuminated by the light beam. Two inset images show the internal mechanism for fixed and adjustable beam angles.

Adjustable beam angle

15°
 24°
 36°

$\Phi 45\text{mm}$

Beam angle can be freely adjusted from $15^\circ \sim 36^\circ$ via screw driver

Fixed angle : $15^\circ / 24^\circ / 36^\circ$

Adjustable beam angle $15^\circ \sim 36^\circ$