

# DOWNLIGHT




## POLY R

IP	CRI	PF	AC220-240V	Dimmable	Anti-Glare
20	90+	≥0.9			



### POLY R DOWNLIGHT

- 1 - Mini size in 33mm/45mm/60mm.
- 2 - Precise beam angles in 15°/24°/36° with smooth and concentric speckle.
- 3 - Different mounting types: track mounting, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless. Anti-glare structure for maximum eye comfort.
- 4 - Special design in vertical texture suits for decorative style. Aluminum, with painting finishing

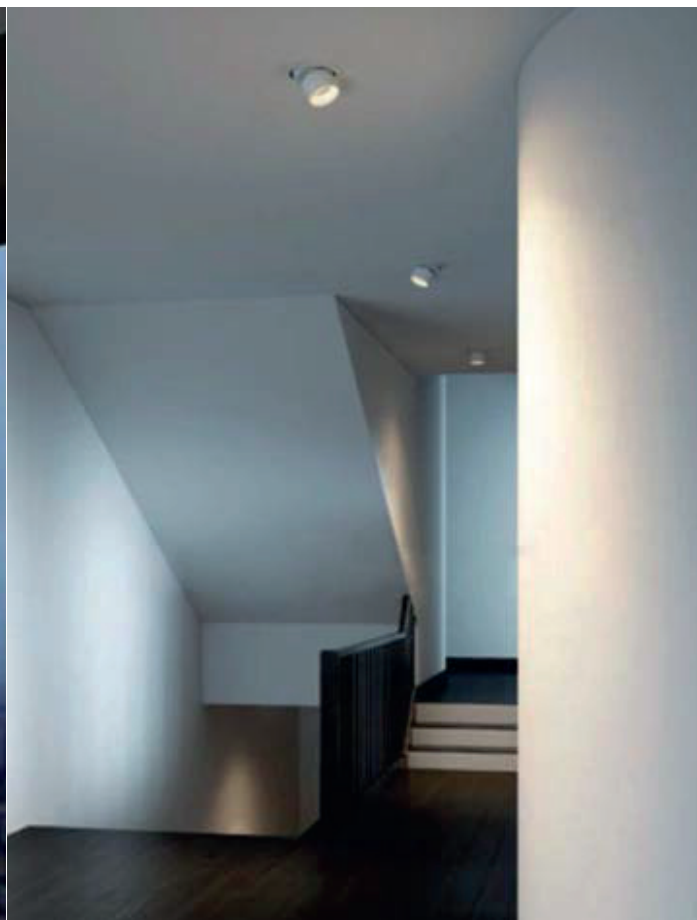

## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-2240A	1*3W	180lm	2700K/3000K/3500K/4000K	15°/24°/36°	IP20	Ø33*131mm	90°
LX-DL-2340A	1*7W	420lm				Ø45*166mm	
LX-DL-2440A	1*18W	1080lm				Ø60*257mm	


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## OPTICS




## HOUSING IN DIFFERENT COLOR

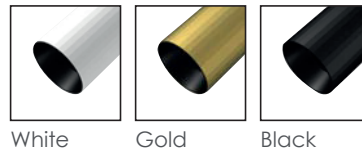


## Dimensions


LX-DL-2240A-LED



LX-DL-2340A-LED

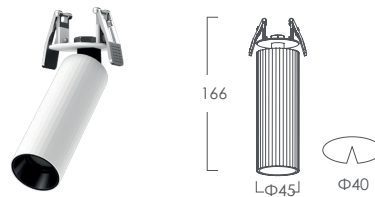

LX-DL-2440A-LED

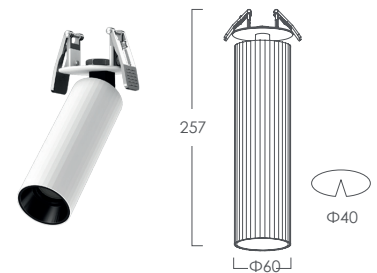

## Features

The diagram illustrates a lighting fixture with a conical lens. A screwdriver is shown inserted into the center of the lens, with curved arrows indicating its rotation. Below the lens, three orange arcs represent beam angles of 15°, 24°, and 36°. A dashed line extends from the center of the lens to a circular inset at the bottom right, which shows two views of the lens: one with a fixed angle and one with an adjustable angle. The diameter of the lens is labeled as  $\Phi 45\text{mm}$ . Below the lens, a classical bust of a man's head is shown, illuminated by the light beam.

**Adjustable beam angle**

15°  
24°  
36°

$\Phi 45\text{mm}$

Beam angle can be freely adjusted from 15°~36° via screw driver

Fixed angle : 15° / 24° / 36°

Adjustable beam angle 15°~36°