

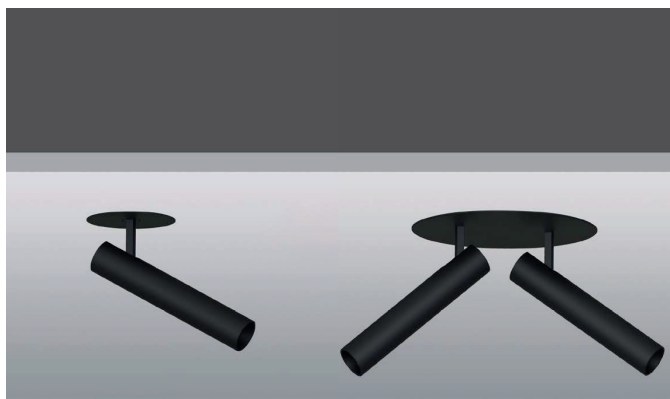


# DOWNLIGHT



## RADAR S



### RADAR S

Single and double heads head large angle adjustment design, recessed installation, different sizes of recessed base as options for different spaces.


Applications : Hotels, Shopping malls, Restaurants, Bars, Villas, etc.

Physical : Aluminum

Colour(housing) : black, White

Colour(reflector) : Black

Colour temperature : 2700K, 3000K, 4000K, 5000K

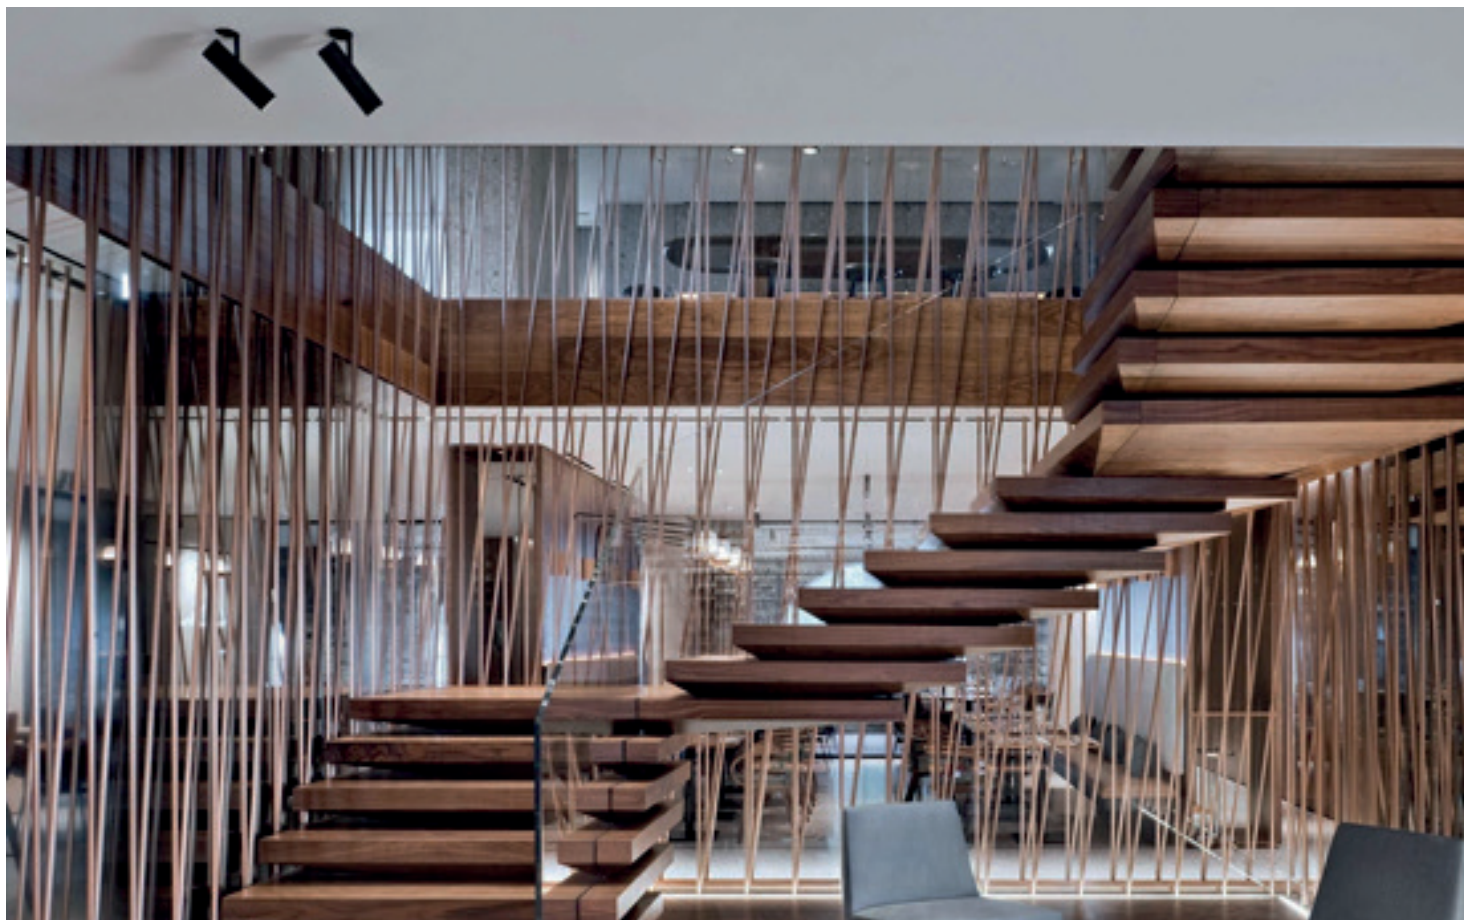


## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-2351	7W	446-469lm	2700K	15°/24°/33°	IP20	( $\varnothing 35 \times 185 \text{mm}$ ) / ( $\varnothing 93 \text{mm}$ )
LX-DL-2353						( $\varnothing 35 \times 185 \text{mm}$ ) / ( $\varnothing 200 \text{mm}$ )
LX-DL-2352	2*7W	892-938lm	2700K	( $\varnothing 35 \times 185 \text{mm}$ ) / ( $\varnothing 200 \text{mm}$ )		
LX-DL-2505	12W	812-850lm	3000K	15°/24°/38°		( $\varnothing 50 \times 190 \text{mm}$ ) / ( $\varnothing 93 \text{mm}$ )

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Features

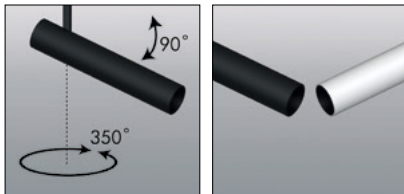

## Dimensions

