

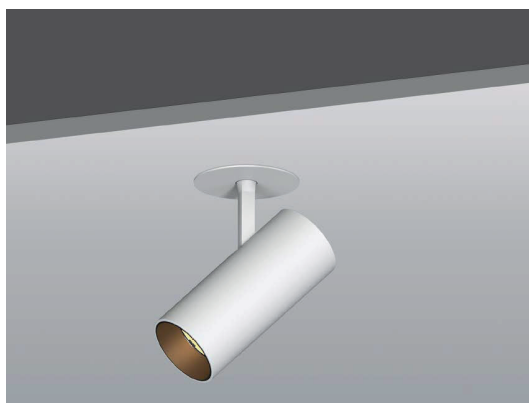


DOWNLIGHT



SPOTLIGHT



SPOTLIGHT

Recessed installation, adjustable and flexible direction, minimalist design makes the lamp become a part of the decoration, while providing higher brightness and greater power.

Applications : Shopping malls, Museums, Galleries, Exhibition halls, Hotels, Restaurants, Bars, Convention centers, etc.

Physical : Aluminum

Colour(housing) : black, White

Colour(reflector) : Black

Colour temperature : 2700K, 3000K, 4000K, 5000K



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-2502	8W	630-661lm	2700K	15°/24°/38°	IP20	(Ø50*130mm)/(Ø80*40mm)
		632-664lm	3000K			
	10W	705-734lm	2700K			
		740-779lm	3000K			
	12W	802-825lm	2700K			
		821-864lm	3000K			
LX-DL-2702	15W	895-922lm	2700K			(Ø70*160mm)/(Ø92*40mm)
		920-971lm	3000K			
	20W	945-1064lm	2700K			
		1072-1122lm	3000K			
	25W	1303-1468lm	2700K			
		1500-1570lm	3000K			
		1622-1760lm	2700K			
		1716-1803lm	3000K			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions

