

DOWNLIGHT



SPY W

IP 20	CRI 90+	PF ≥0.9	AC220-240V	Dimmable	Anti-Glare
-----------------	-------------------	-------------------	-------------------	-----------------	-------------------



SPY W DOWNLIGHT

- 1 - Mini size in 33mm/45mm/60mm.
- 2 - Precise beam angles in 15°/24°/36° with smooth and concentric speckle.
- 3 - Different mounting types: track mounting, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless. Anti-glare structure for maximum eye comfort.
- 4 - Special design in vertical texture suits for decorative style. Aluminum. with painting finishing



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-W2675AT	1*3W	180lm	2700K/3000K/4000K	15° / 24° / 36° / Random beam angle:15°~36°	IP20	(Ø111xH90mm) (Ø33xH47mm)	25°
LX-DL-W2690AT	1*7W	420lm				(Ø123xH105mm) (Ø45xH47mm)	
LX-DL-W26105AT	1*18W	1080lm				(Ø139xH140mm) (Ø60xH47mm)	
LX-DL-W27110AT	2*3W	360lm				(Ø145xH88mm) (Ø33xH47mm)	
LX-DL-W26135AT	2*7W	840lm				(Ø192xH103mm) (Ø45xH71mm)	
LX-DL-W25165AT	2*18W	2160lm				(Ø222xH140mm) (Ø60xH71mm)	


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS




HOUSING IN DIFFERENT COLOR

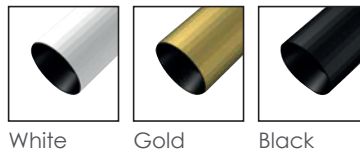


Dimensions


LX-DL-W2675AT

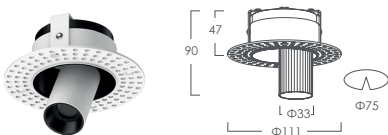


LX-DL-W2690AT

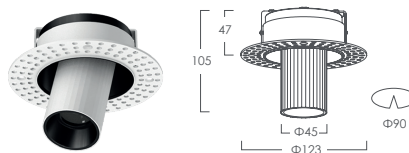


LX-DL-W26105AT

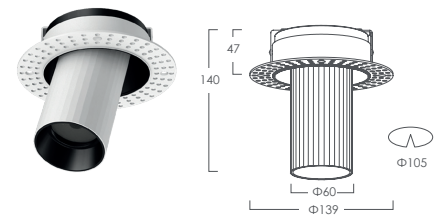


LX-DL-W27110AT

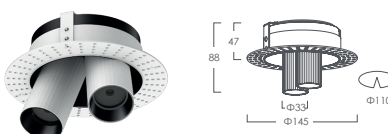

LX-DL-W26135AT

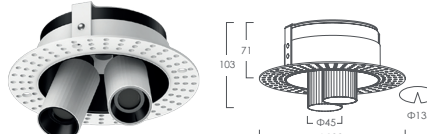

LX-DL-W25165AT

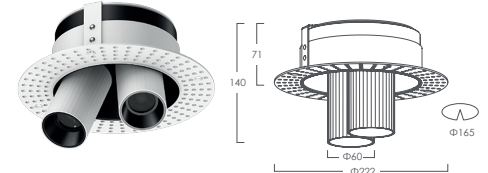

Features

The diagram illustrates a spotlight with a white body and a brass-colored housing. A screwdriver is shown adjusting the internal lens. The beam angle is adjustable, with three specific angles marked: 15°, 24°, and 36°. The spotlight is shown illuminating a classical bust. The diameter of the housing is indicated as $\Phi 45\text{mm}$. Two inset images show the internal lens mechanism: one for fixed angles (15°, 24°, 36°) and one for adjustable angles (15°~36°).

Adjustable beam angle

15°
24°
36°

$\Phi 45\text{mm}$

Beam angle can be freely adjusted from 15°~36° via screw driver

Fixed angle : 15° / 24° / 36°

Adjustable beam angle 15°~36°