

DOWNLIGHT



TECO

IP 20	CRI 90+	PF ≥0.9	AC220-240V	Dimmable	Anti-Glare
-----------------	-------------------	-------------------	-------------------	-----------------	-------------------



TECO DOWNLIGHT

- 1 - Mini size in 33mm/45mm/60mm.
- 2 - Precise beam angles in 15°/24°/36° with smooth and concentric speckle.
- 3 - Different mounting types: track mounting, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless, surface-mounted, recessed-mounted, half recessed-mounted, pendant downlight, trim&trimless. Anti-glare structure for maximum eye comfort.
- 4 - Special design in vertical texture suits for decorative style. Aluminum. with painting finishing



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions	Adjustable
LX-DL-2550A	1*3W	180lm	2700K/3000K/3500K/4000K	15°/24°/36°	IP20	Ø55*94mm	90°
LX-DL-2560A	1*7W	420lm				Ø66*125mm	
LX-DL-2575A	1*18W	1080lm				Ø82*183mm	


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

OPTICS




HOUSING IN DIFFERENT COLOR

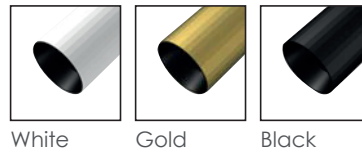


Dimensions


LX-DL-2550A

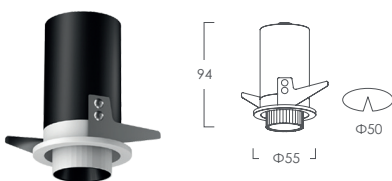

LX-DL-2560A

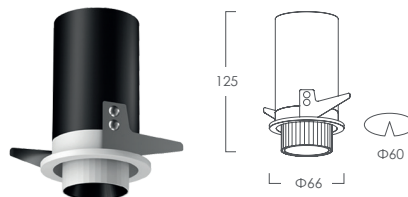

LX-DL-2575A

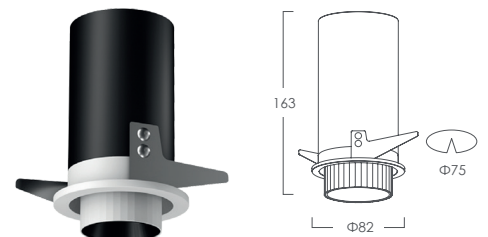

Features

The diagram illustrates the adjustable beam angle feature of a Luxio lighting fixture. A central image shows a white screw driver inserted into the fixture's adjustment mechanism. Three curved arrows indicate the beam angle can be set to 15°, 24°, or 36°. Below the fixture, a classical bust is shown illuminated by the light. To the right, the text 'Adjustable beam angle' is displayed. At the bottom, two circular insets show the internal lens mechanism for fixed and adjustable angles. The diameter of the fixture is labeled as $\Phi 45\text{mm}$.

Adjustable beam angle

15°
24°
36°

$\Phi 45\text{mm}$

Beam angle can be freely adjusted from 15°~36° via screw driver

Fixed angle : 15° / 24° / 36°

Adjustable beam angle 15°~36°