

# DOWNLIGHT



## TUBE R

|                 |                   |                   |                   |                   |
|-----------------|-------------------|-------------------|-------------------|-------------------|
| <b>IP</b><br>20 | <b>CRI</b><br>>90 | <b>AC220-240V</b> | <b>Anti-Glare</b> | <b>No Flicker</b> |
|-----------------|-------------------|-------------------|-------------------|-------------------|

|              |              |                  |
|--------------|--------------|------------------|
| <b>PHASE</b> | <b>1-10V</b> | <b>Bluetooth</b> |
|--------------|--------------|------------------|

|                           |                                    |           |             |                   |
|---------------------------|------------------------------------|-----------|-------------|-------------------|
| <b>3</b><br>YEAR WARRANTY | <b>CITIZEN</b><br>Micro-LEDmanTech | <b>CE</b> | <b>RoHS</b> | <b>50000h@L80</b> |
|---------------------------|------------------------------------|-----------|-------------|-------------------|

### TUBE R

High power surface mounted / pendant spotlight can help you to solve the installation problems. It can provide you with higher brightness, meet the requirements of higher and larger space lighting, and provide more luminous flux.


Applications : Hotels, Shopping malls, Restaurants, Bars, Villas, etc.

Physical : Aluminum

Colour(housing) : black, White

Colour(reflector) : Black, White, Gold

Colour temperature : 2700K, 3000K, 4000K, 5000K

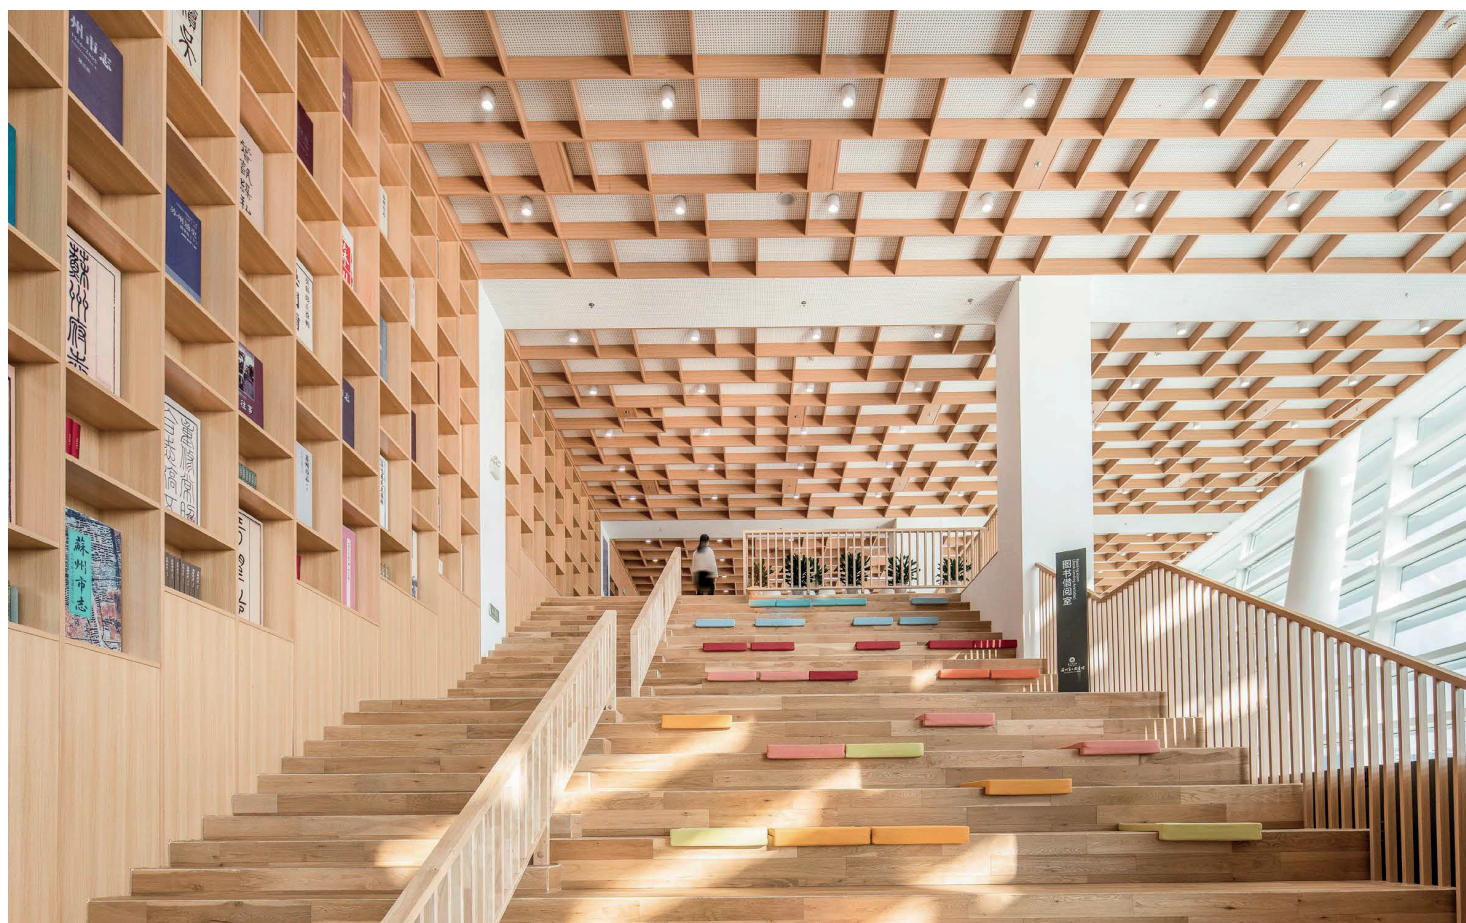

**luxio**  
LIGHTING

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

| Reference   | Led Power | Luminous flux | CCT/K | OPTICS          | IP Rating | Dimensions  |
|-------------|-----------|---------------|-------|-----------------|-----------|-------------|
| LX-DL-8901  | 8W        | 572-648lm     | 2700K | 24°/38°/60°     | IP20      | Ø90*H185mm  |
|             |           | 576-660lm     | 3000K |                 |           |             |
|             | 12W       | 801-973lm     | 2700K |                 |           |             |
|             |           | 829-1010lm    | 3000K |                 |           |             |
|             | 15W       | 868-1081lm    | 2700K |                 |           |             |
|             |           | 900-1101lm    | 3000K |                 |           |             |
| LX-DL-8906  | 10W       | 686-824lm     | 2700K | 15°/24°/38°/60° | IP20      | Ø90*H115mm  |
|             |           | 699-853lm     | 3000K |                 |           |             |
| LX-DL-81241 | 15W       | 1035-1122lm   | 2700K |                 |           | Ø124*H220mm |
|             |           | 1072-1151lm   | 3000K |                 |           |             |
|             | 20W       | 1473-1544lm   | 2700K |                 |           |             |
|             |           | 1551-1719lm   | 3000K |                 |           |             |
|             | 25W       | 1689-1821lm   | 2700K |                 |           |             |
|             |           | 1762-1972lm   | 3000K |                 |           |             |
| LX-DL-81243 | 15W       | 1035-1122lm   | 2700K |                 |           | Ø124*H130mm |
|             |           | 1072-1151lm   | 3000K |                 |           |             |

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Features



## Dimensions



|                    |                    |                     |                     |
|--------------------|--------------------|---------------------|---------------------|
| <p>LX-DL-8901</p>  | <p>LX-DL-8906</p>  | <p>LX-DL-81241</p>  | <p>LX-DL-81243</p>  |
| <p>LX-PEN-5901</p> | <p>LX-PEN-5906</p> | <p>LX-PEN-51241</p> | <p>LX-PEN-51243</p> |