

# DOWNLIGHT

## TUBE S



<b>IP</b> 20	<b>CRI</b> >90	AC220-240V	Anti-Glare	No Flicker
-----------------	-------------------	------------	------------	------------

PHASE	1-10V		
-------	-------	--	--

3 YEAR WARRANTY	CITIZEN Micro-LED HumanTech	CE	RoHS	50000h@L80
-----------------------	-----------------------------------	----	------	------------

### TUBE S

High power surface mounted / pendant spotlight can help you to solve the installation problems. It can provide you with higher brightness, meet the requirements of higher and larger space lighting, and provide more luminous flux.

Applications : Hotels, Shopping malls, Restaurants, Bars, Villas, etc.

Physical : Aluminum

Colour(housing) : black, White

Colour(reflector) : Black, White, Gold

Colour temperature : 2700K, 3000K, 4000K, 5000K




## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions		
LX-DL-8902	8W	572-648lm	2700K	24°/38°/60°	IP20	90*90*H185mm		
		576-660lm	3000K					
	12W	801-973lm	2700K					
		829-1010lm	3000K					
	15W	868-1081lm	2700K					
900-1101lm		3000K						
LX-DL-8905	10W	686-824lm	2700K	15°/24°/38°/60°	IP20	90*90*H115mm		
		699-853lm	3000K					
LX-DL-81242	15W	1035-1122lm	2700K			15°/24°/38°/60°	IP20	124*124*H220mm
		1072-1151lm	3000K					
	20W	1473-1544lm	2700K					
		1551-1719lm	3000K					
	25W	1689-1821lm	2700K					
1762-1972lm		3000K						
LX-DL-81244	15W	1035-1122lm	2700K	15°/24°/38°/60°	IP20	124*124*H130mm		
		1072-1151lm	3000K					

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Features

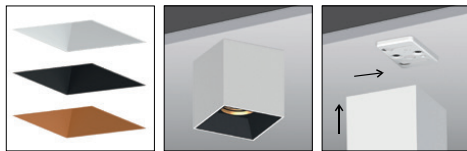

## Dimensions

