
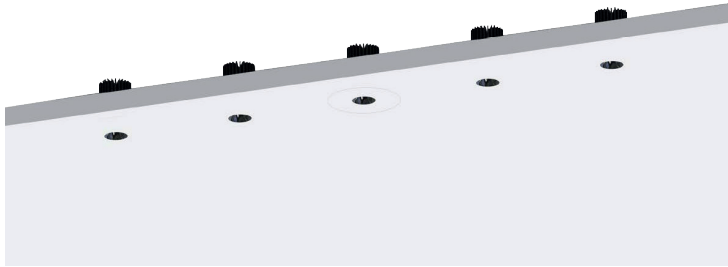


DOWNLIGHT

TWINKLESTAR L



TWINKLESTAR L

Trinity array design, easy installation.

The light outlet diameter is 35mm, high-power design, which can hide the lamp perfectly, realize the effect of seeing light but not seeing lighting body, and can also be used as the maintenance port of electrical appliances.

Applications : Showrooms, Restaurants, Star-rated Hotels, Villas, Residential buildings, etc.

Physical : Aluminum

Colour(housing) : Black

Colour(reflector) : Black chrome



References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-1231-3	3*5W	636-801lm	2700K	20°/30°/40°	IP20	L446*H162* W53mm
		792-852lm	3000K			
LX-DL-1231-5	5*5W	1060-1335lm	2700K			
		1320-1420lm	3000K			
LX-DL-1351-3	3*7W	1044-1176lm	2700K	20°/30°	IP20	L446*H162* W89mm
		1056-1179lm	3000K			
	3*10W	1227-1404lm	2700K			
		1236-1425lm	3000K			
LX-DL-1351-5	5*7W	1740-1960lm	2700K			
		1760-1965lm	3000K			
	5*10W	2045-2340lm	2700K			
		2060-2375lm	3000K			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features



Dimensions

