



# DOWNLIGHT

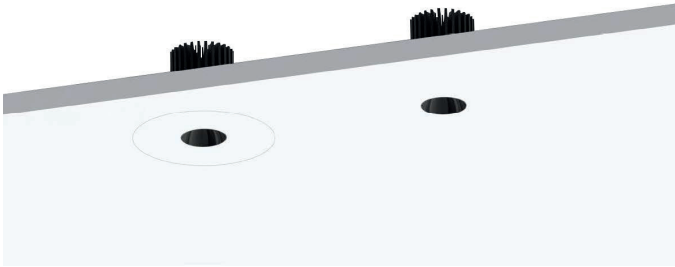

## TWINKLESTAR M



### TWINKLESTAR M

Only 23mm and 35mm light outlet design, hide the light while providing higher power, to meet the high brightness requirements.

Applications : Showrooms, Restaurants, Star-ratedHotels, Villas, Residential buildings,etc.

Physical : Aluminum

Colour(housing) : Black

Colour(reflector) : Black chrome



## References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-1231	5W	212-267lm	2700K	20°/30°/40°	IP20	(Ø23*Ø111*Ø162mm) /W53mm
		264-284lm	3000K			
LX-DL-1232	5W	212-267lm	2700K			
		264-284lm	3000K			
LX-DL-1351	7W	348-392lm	2700K	20°/30°	IP20	(Ø35*Ø110*Ø162mm) /W89mm
		352-393lm	3000K			
	10W	409-468lm	2700K			
		412-475lm	3000K			
LX-DL-1352	7W	348-392lm	2700K			
		352-393lm	3000K			
	10W	409-468lm	2700K			
		412-475lm	3000K			

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Features



## Dimensions

