

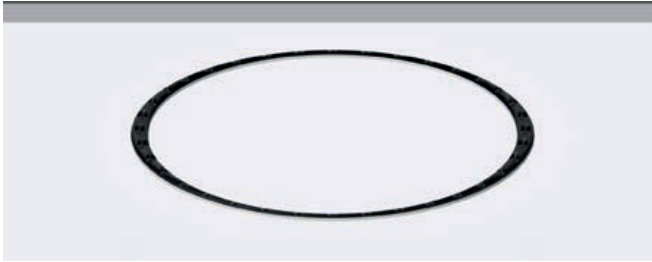


DOWNLIGHT





TWINKLESTAR R



TWINKLESTAR R

Nice exterior appearance, 12/24 heads round integrated design, easy installation. 23mm light outlet diameter, which can hide the lamp perfectly and realize the effect of seeing light but not seeing lighting body. At the same time, it can be integrated as part of the ceiling decoration.

Applications : Showrooms, Restaurants, Star-rated Hotels, Villas, Residential buildings, etc.

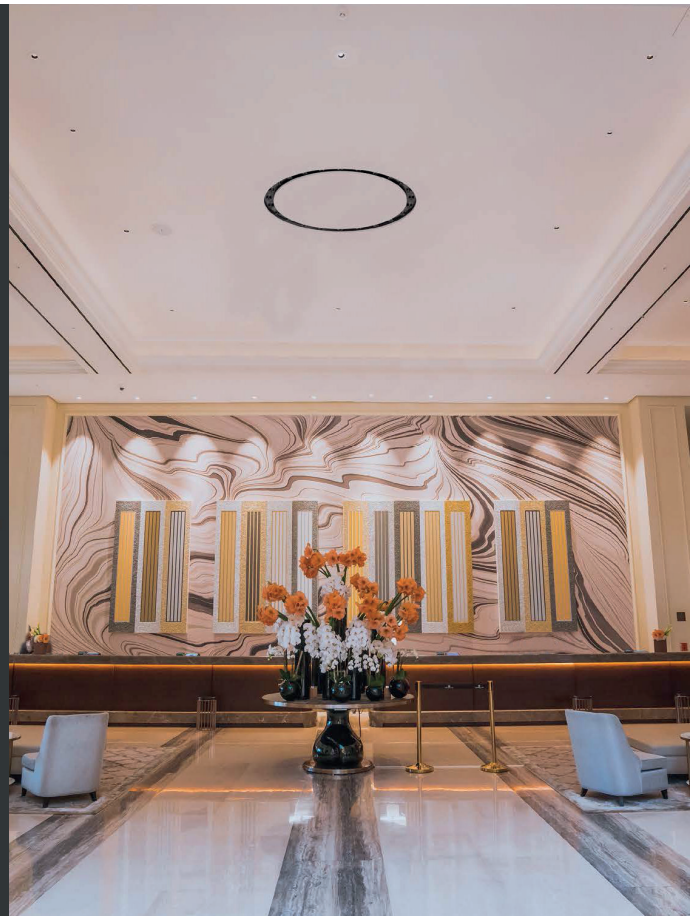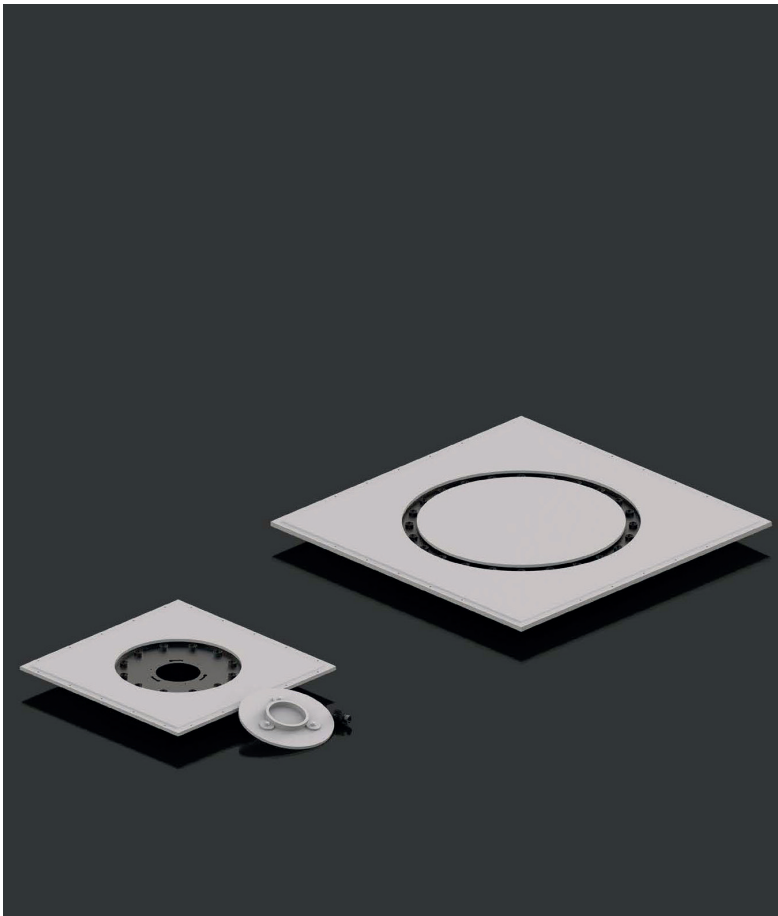

References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-DL-1231-12	12*3W	1824-1884lm	2700K	15°/24°/34°	IP20	L600*H600* W60mm
		2004-2052lm	3000K			
LX-DL-1231-24	24*3W	3648-3768lm	2700K			
		4008-4104lm	3000K			L950*H950* W60mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features



Dimensions

