

GARDEN LIGHT



LX-FL-B3C-PQR



AC120-240V



HOUSING 12# Die-casting dark grey powder coated aluminum.
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

BRACKET Powder coated aluminum.T=2.5mm

LIGHT WINDOW Tempered glass.T=3mm

LED NICHIA

LED DRIVER Constant Voltage Input, Constant Current Output

CABLE GLAND IP68 PG-9 PA66

GASKET Tooling shaped seal

POWER CABLE H07RN-F 2×1.0mm² L=2.0m (low voltage)
H07RN-F 3×1.0mm² L=2.0m (high voltage)

DIMMABLE SUPPORT Triac PWM 1-10V Dali



References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-FL-B3C-PQR	50W	10pcs	AC120-240V	3869lm	3000K/4000K/5700K CCT	8°/50°/15°/20°/30°	IP66	Ø200*H272*W192mm
	90W	18pcs		7489lm				Ø250*H333*W235mm
	135W	24pcs		12326lm				Ø300*H390*W287mm


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Housing color option




Water proof solution

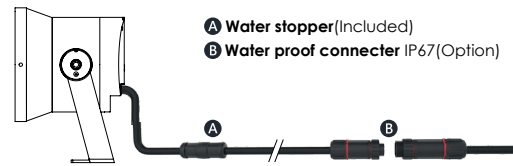


Dimensions

LX-FL-B3C-PQR-50W



LX-FL-B3C-PQR-90W



LX-FL-B3C-PQR-135W

