

# GARDEN LIGHT



## LX-G-D9A-GLMH



### Garden Light

|                       |   |
|-----------------------|---|
| HOUSING               | T=60-80µm, Adhesion of ISO class 1/ASTM class 4B<br>12# Die-casting powder coated aluminum.   |
| LIGHT WINDOW          | PMMA  |
| LED                   | SMD 3535 Type LED   |
| LED DRIVER            | Constant Voltage Input, Constant Current Output   |
| OPERATING TEMPERATURE | -20°C~40°C  |
| GASKET                | Tooling shaped seal   |
| POWER CABLE           | H05RN-F 3×1.0mm <sup>2</sup> L=0.3m(high voltage/short)<br>H05RN-F 3×1.0mm <sup>2</sup> L=2.0m(high voltage/medium)<br>H05RN-F 3×1.0mm <sup>2</sup> L=2.0m(high voltage/high) |
| BASE                  | Standard Base Flange Base   |



## References

| Reference   | Led Power | Led     | Input Voltage | Luminous flux | CCT/K       | IP Rating | Dimensions  |
|-------------|-----------|---------|---------------|---------------|-------------|-----------|-------------|
| LX-G-D9A-GL | 6W        | SMD4040 | AC120-240V    | 183lm         | 3000K/6000K | IP65      | Ø110*H300mm |
| LX-G-D9A-GM |           |         |               |               |             |           | Ø110*H550mm |
| LX-G-D9A-GH |           |         |               |               |             |           | Ø110*H800mm |

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Housing color option

Basic



Sanded Black  
RAL 9005

Secondary



Dark Grey  
KAP 7037



Light Sanded Grey  
RAL 7038

## Dimensions

## BASE




LX-G-D9A-GL



LX-G-D9A-GM




LX-G-D9A-GH

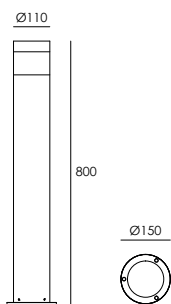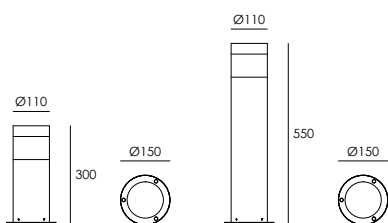

1. Flange Base




2. Landing Base

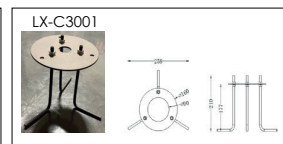

• Flange Base is a basic part which you need to assemble the landing base.

Supplementary lighting



Use of light source modules pc IP66  
Built-in power module IP66  
Wire buckle protection level IP67

