


UNDERWATER

LX-IG-130



HOUSING	Hard chromeplated molding shaped stainless steel SUS 316#
LIGHT WINDOW	Step tempered glass. T=10mm
CABLE GLAND	IP68 PG-11 copper with nickel-coated
GASKET	Silicone gasket
PCB	Excellent heat conductivity aluminum. coefficient of heat Conductivity $\geq 2.0w/mk$
LED DRIVER	Constant Voltage Input, Constant Current Output
APPLICATION ENVIRONMENT	Temperature of water between -20°C~40°C less than 1 meter depth
BUILT-IN OVERHEAT SENSOR SYSTEM	Automatic Shutdown at 75°C
POWER CABLE	H07RN-F 2X1.0mm ² L=3.0m
DIMMABLE SUPPORT	Triac PWM 1-10V Dali

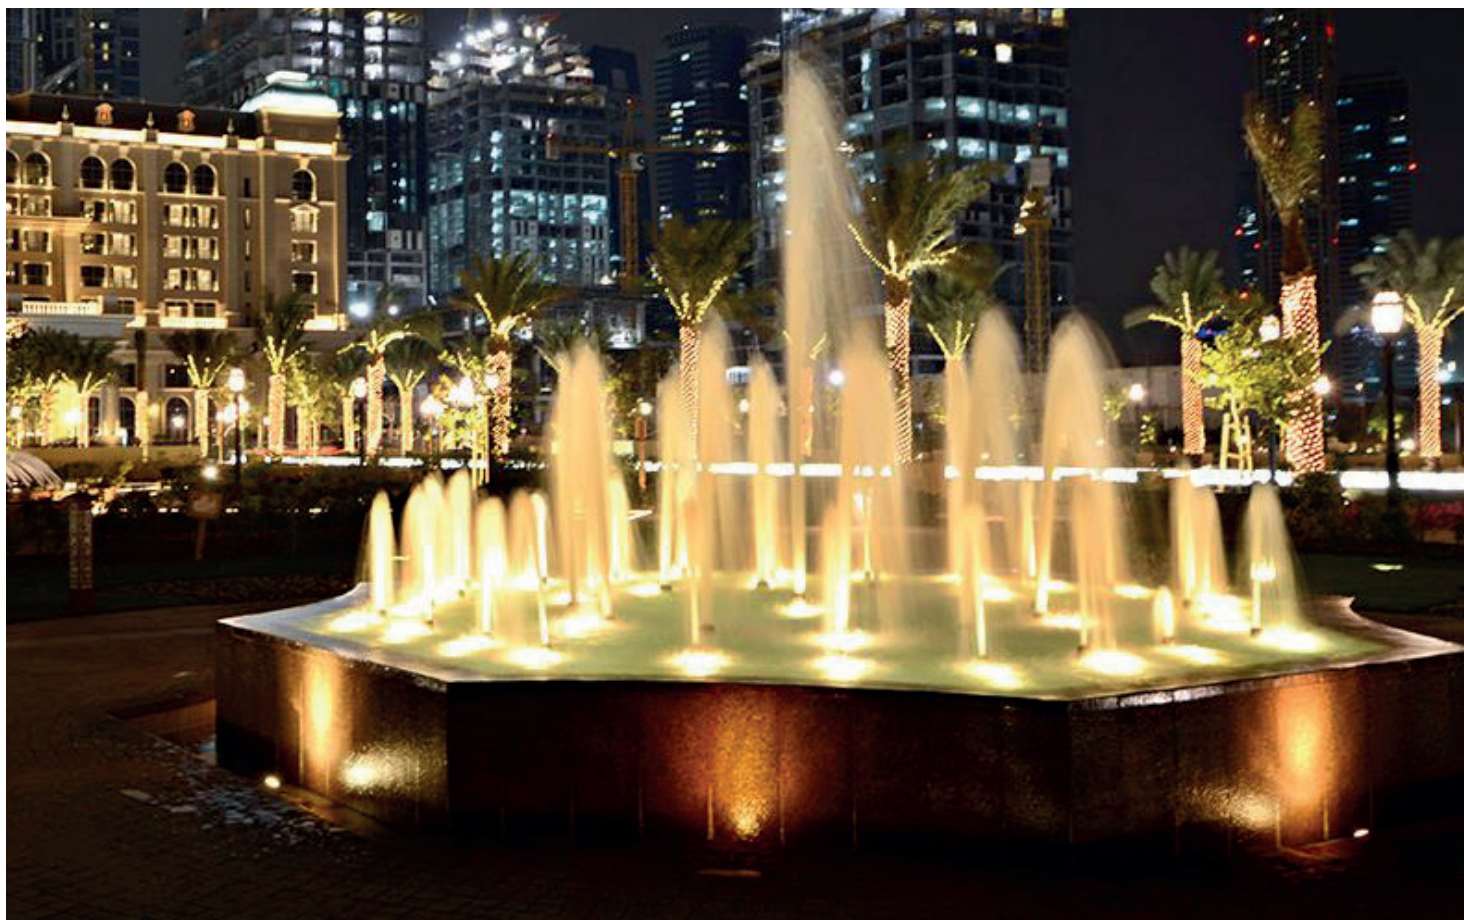

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-IG-130	12x2W	12pcs	DC24V	1610-2067lm	2000K/3000K /6000K	20°/25°/30°/35°/45°	IP68	Ø182*W65mm


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Water proof solution



Central Ejective



Water jet pipe G1 1/2" taper

- A Water stopper**(Included)
- B Water proof connector** IP68(Option)



Dimensions

