

UNDERWATER

LX-IG-138



HOUSING Hard chromeplated Molding shaped stainless steel SUS 316L#

FRONT COVER Hard chromeplated Stainless steel SUS 316L#

LIGHT WINDOW Step tempered glass.T=7mm

WATERPROOF SEAL EPDM gasket

LENS Separate optical lens efficiency≥85%

CABLE GLAND IP68 M1 6a copper with nickel-coated

PCB Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk

LED DRIVER Constant Voltage Input,Constant Current Output

POWER CABLE H07RN-F 2X1.0mm² L=3.0m

APPLICATION ENVIRONMENT Temperature of water between -20°C~40°C less than 1 meter depth




References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-IG-138	3W	1pc	DC24V	139-174lm	2000K/3000K /6000K	9°/15°/20°/30°/45°	IP68	Ø60*W102*H127.5mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions

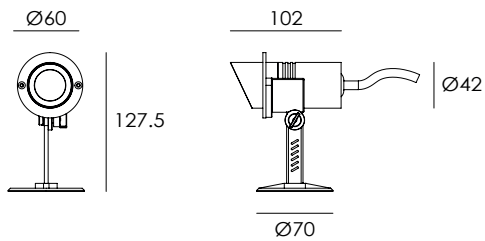

Water proof solution

- A** Water stopper(Included)
- B** Water proof connector IP68(Option)

